

# Smart Cities Monitoring through Wireless Smart Cameras

Davide Moroni

Institute of Information Science and Technologies -  
ISTI-CNR  
Pisa, Italy  
Davide.Moroni@cnr.it

Giuseppe Riccardo Leone

ISTI-CNR  
g.leone@cnr.it

Gabriele Pieri\*

Institute of Information Science and Technologies -  
ISTI-CNR  
Pisa, Italy  
Gabriele.Pieri@cnr.it

Marco Tampucci

ISTI-CNR  
Marco.Tampucci@cnr.it

## ABSTRACT

Cities and urban environments nowadays suffer more and more discomfort due to several factors: the increase in the number of cars, the reduction, due to budget issues, of free parking, the economic difficulties in times of crisis that lead to a reduced efficiency of the public transport system. Beside these factors, an increased availability of computing facilities and devices bring the possibility to improve one of the most burdening aspects, that is the traffic generated by cars searching for a parking place. In this paper we present an approach based on wireless smart cameras to the monitoring of open air public parking areas. The main strengths of this solution lie in the independence and scalability of the proposed architecture. Independence is mainly based on autonomous intelligent cameras performing processing on-board; while scalability is mainly obtained through low cost single node which can be assembled in a wider sensors network and do not need high-cost requirements for installation.

## CCS CONCEPTS

• **Computer systems organization** → **Sensor networks**;

## KEYWORDS

Algorithms for embedded and real-time systems, Intelligent sensors, Wireless sensor networks, Urban monitoring, Smart cameras, Vision sensors

### ACM Reference Format:

Davide Moroni, Gabriele Pieri, Giuseppe Riccardo Leone, and Marco Tampucci. 2019. Smart Cities Monitoring through Wireless Smart Cameras. In *Proceedings of Applications of Intelligent Systems (APPIS2019)*. ACM, New York, NY, USA, Article 5, 6 pages. <https://doi.org/10.1145/nnnnnnn.nnnnnnn>

## 1 INTRODUCTION

Smart cities are increasingly composed of pervasive and ubiquitous computing devices and facilities which extend the monitoring

\*This is the corresponding author.

Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for third-party components of this work must be honored. For all other uses, contact the owner/author(s).

APPIS2019, January 2019, Las Palmas de Gran Canaria, Spain

© 2019 Copyright held by the owner/author(s).

ACM ISBN 978-x-xxxx-xxxx-x/YY/MM.

<https://doi.org/10.1145/nnnnnnn.nnnnnnn>

capability but, in the meanwhile, their economy and governance need to be driven by creativity, and innovative entrepreneurship, yet performed by smart people. Two main factors should be met for an effective improvement in direction of building up a smart city: an increase of the extent of computing and digitally instrumented devices built into the very fabric of urban environments, and the degree of development of knowledge economy in the governance of the city itself [7]. Access to mobility resources is a key aspect of smart cities where the two above mentioned factors might have a great impact. In this paper, we demonstrate the opportunities offered by Wireless Smart Cameras (WSC), a particular kind of pervasive sensing and computing technology, in driving the transition towards Mobility as a Service (MaaS) paradigm, using the problem of parking resources as a guide example.

Several works in literature report estimates regarding the proportion of cars traveling on urban streets during business days that are cruising for parking that is 30% or even higher [19]. In general an estimate of the number of cars searching for a parking is not easy, first because these are not different from other cars, secondly because the estimate is very variable due to the number of total vehicles cruising, to the number of available parking spaces and other factors [5].

In any case, it is clear that an automatic system capable of monitoring city streets and parking might be very effective in addressing this problem, for example by suggesting an area on a map where a parking space is more likely to be found. Several systems have been proposed and tested regarding smart parking or parking guidance systems [17]; they usually obtain the availability information of parking spaces from deployed sensor networks, which could be based on data acquired from ground or other kind of sensors, and simply publish the parking information to drivers heading there [18, 21]. Other systems have very strict requirements, such as the the knowledge over all the vehicles looking for a parking [10], and are mainly based on optimizing an allocation algorithm. Another interesting and current issue regards algorithms managing pricing (i.e. variable price) and available resources (i.e. available parking and proximity) through a dynamic allocation and reservation [12], yet an important constraint is the capability to reserve a specific parking space.

In view of the previous considerations, the main contribution of this paper is to present an intelligent and scalable solution for active cooperative monitoring, based on wireless smart cameras and to study and experiment its applicability to a real urban environment represented by a mid size Italian city of art.

## 2 MATERIALS


In this paper, smart cities monitoring is achieved through the use of Wireless Smart Cameras (WSC). A WSC is a camera equipped with an embedded unit for performing computer vision and image understanding tasks and a radio network interface to communicate wireless the output of its processing. In the context of this paper, WSC have been designed and used to provide a low cost and sustainable sensing technology with excellent scalability features to allow for pervasive monitoring in wide urban areas. Indeed, thanks to the use of properly designed WSC it is possible to obtain a number of advantages.

First, given the trend in the cost of hardware, smart cameras with adequate vision and computing capabilities can be manufactured at low cost. Being wireless, the installation cost is also lower, since no cabling is necessary. This makes CapEx (Capital Expenditure) costs low. Since cameras can be self powered e.g. thanks to the use of photo-voltaic panels, also OpEx (Operational Expenditure) costs can be cut down, accounting only for routine maintenance.

Secondly, computer vision has a greater ductility with respect to other scalar sensing technology. This means that the same camera can be used for addressing several application by changing the on board computer vision algorithm. Even, the same camera can provide additional services with respect to the ones it was meant for when installed. For instance, a camera installed for security and video surveillance can produce information about urban mobility as well.

Thirdly, several WSC can be put together to form a WSC network: since each camera views the observed scene from a particular perspective, together cameras can provide a more robust and complete understanding of a scene. The WSC network has also scalability features, since it is not necessary to transmit routinely the raw image data or video stream but it is enough to communicate the interpretation of the scene extracted by each camera, which can be encoded in a relatively small number of bits.

On the basis of such considerations, a custom WSC has been designed, implemented and tested. The prototype is based on an own designed embedded board (see Figure 1).

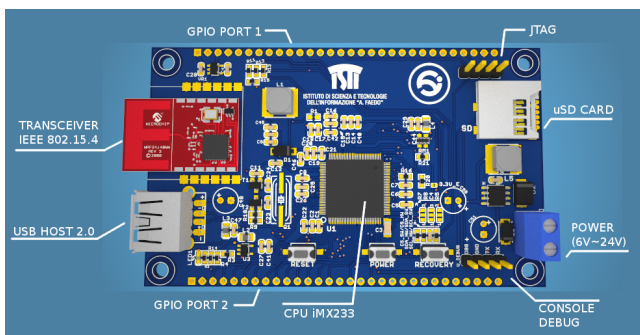

**Figure 1: The own designed embedded board.**

The embedded board is powered by a *Freescale CPU* based on the ARM architecture, with support for MMU-like operating systems GNU/Linux. The chosen architecture has been proved to have an average consumption measured at the highest speed (454MHz) of

less than 500mW. A microSD slot is present, which is essential for booting the system, booting the kernel and file-system associated (EXT4); the board can be upgraded simply by changing the contents of the microSD. The *ArchLinux* distribution has been chosen as embedded Linux operating system. Development and deployments are currently based on Linux Kernel 3.14.39.


The core of this board has been already subject of experimentation in some previous works which were dedicated to show its suitability as an embedded processor for smart cameras in several applications. For instance in [15] it has been used for traffic flow monitoring while in [16] it has been integrated in a framework for management of urban railway crossing. In [9, 13] it has been used for monitoring of fast failures and geological risk, ending with a long lasting experimentation [8] in a segregated area during which autonomy was obtained relying on an energy harvesting system. In that case, a 3G network interface was used for communication. In [3], an application to smart video surveillance has been provided, using in this case wired communication based on IEEE 802.3. In [1, 4, 14], cooperation among the cameras was addressed in the framework of urban mobility, relying on a 6LOWPAN over IEEE 802.15.4, with connectivity provided through an external communication board.

The aforementioned works show that our proposed board is suitable for addressing disparate scenarios, relying on several communication technologies and showing an optimal autonomy grade thanks to successful long lasting outdoor experiments. In this paper, in order to address the problem of smart parking in a mid size city, we resorted to the configuration reported in Figure 2, in which the proposed board is integrated with a camera (by *ELP Corporation*) endowed with a 1/3" CMOS AR0330 sensor providing both still images and H264 video stream at full HD. Two optical lenses configuration have been considered, featuring also a 3.6mm fish-eye one for a wider field of view. Night vision is also available by removal of the IR-cut filter. The selected camera is compliant with USB Video Class (UVC) standard [20] which makes it possible to integrate the software with the embedded board, implementing both camera control and data acquisition.

For what regards network communication, besides the on-board IEEE 802.15.4 transceiver, an IEEE 802.11 interface has been added, since it allows for an easier and direct integration with Wi-Fi networks that are available in the urban scenario. This is achieved by connecting to an external USB module which is providing Wi-Fi connectivity.

The embedded board, the camera and the Wi-Fi module are housed into a poly-carbonate IP67 shield, which is subject to less electromagnetic attenuation with respect to metallic cases. The other important component of the WSC is the power supply and energy harvesting system that controls charging and permits to choose optimal energy savings policies. The power supply system includes a lead (*Pb*) acid battery pack and a module for harvesting energy through a photo-voltaic panel. For the experimentation, a 12V panel with a nominal power of 15W was used and managed by a regulator outputting up to 4A DC current. A 12Ah battery has been normally used for tests. The embedded board has also been used to measure the charging status of the batteries. To this end, an ADC Conditioning module has been used to adapt the voltage

level of the power supply system to the voltage range of the board ADC input.

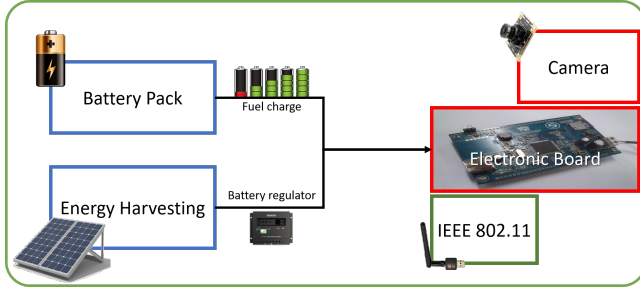

**Figure 2: Designed configuration for the Wireless Smart Camera (WSC).**

### 3 METHODS

The goal of this section is to introduce computer vision methods suitable for deployment on WSC and capable of addressing the parking lot monitoring problem for the detection of empty spaces.

Generally, visual analytic methods for assessing the status of a parking area and determining availability are distinguished into two broad groups, namely *car-based* and *space-based* approaches, with possible hybridization (see e.g. [11]). In car-based approaches, the algorithm searches for cars inside the image; all the found car instances are then mapped to existing and predefined parking spaces. By converse, in space-based methods, the algorithm analyzes a number of Regions Of Interest (ROI) in the images corresponding to the parking spaces in the physical world and assesses if these regions are occupied by some objects or not. Car-based approaches are useful for inferring information besides the mere occupancy status, since they can be used to detect vehicles either misplaced or hindering the normal traffic flow. As a disadvantage, they usually require the analysis of the whole images or of large portions of them, resulting in a higher computational burden. By converse, in space-based methods most of the computation can be done only in the ROI; further, space-based methods sometimes can output if a parking space is not available, independently from the fact if it is occupied by a car or by a different bulky object (e.g. dumpster). Hybrid methods combining space- and car-based approach can be superior, especially if they rely on artificial intelligence paradigms capable of recognizing several class of objects, but they come at an additional computational cost.

On the basis of these considerations and aiming at an implementation deployable on embedded WSC, we decided to resort to a two-step space-based method. In our approach, the first step is to recognize changes in each of the monitored ROI using a lightweight but adaptive background modelling. If no change has occurred in the ROI (as it happens most of the times), no further computation is carried out. Instead, if a change has been detected in a ROI, a second step is carried out to extract features from the image to allow discriminating empty spaces from occupied ones.

For the first step, an adaptive background is computed because it proved to be the most robust for use in uncontrolled outdoor

scenes. The background is continuously updated using both the previous background model and the latest acquired actual image. Among different models for updating, it has been decided to use a pixel-wise convex combination of the previous background and the current acquired image. A pixel is denoted has changed if its RGB value differs more than a threshold to the corresponding pixel in the background. If more than a certain percentage of pixels in the ROI has changed, then the ROI is marked as *changed* and the second step of the algorithm is performed on such ROI on the current frame and on subsequent ones until finally after a minimum time interval the ROI is marked again as *unchanged*.

The second and finer step is based on the combination of two different image analyses, considering that an empty space should appear as plain asphalt without nothing inside. The first is the so-called asphalt detection: periodically checking small rectangular asphalt samples on the driveway (using the current background image so that no moving vehicle is on the region of interest) we identify similar hue and saturation values in the rest of the image. For each ROI  $R_k$  the index  $a_k(t)$  is computed. This index is proportional to the ratio of asphalt pixels with respect to the total number of pixels in the  $R_k$ . Then a very neat image of the contours of the vehicles is obtained with a Canny edge detection of the current foreground image. Similar to the first one the computed index  $e_k(t)$  is proportional to the ratio of edge pixels in ROI  $R_k$  with respect to the total number of pixels in  $R_k$ . The combination of the two indexes as computed in Eq. 1 creates the final belief of the camera, which indicates the probability of the occupation of the parking space.

$$P_k(t) = e_k(t) \cdot (1 - a_k(t)) \quad (1)$$

Such probability  $P_k(t)$  is converted into an occupancy status  $Q_k(t)$ , which becomes effective only after being observed consecutively for a specific number of acquired frames. In addition, for the implementation of a more robust algorithm that avoids meaningless oscillations, the above decision is further improved using two levels of thresholds  $\varepsilon_1 < \varepsilon_2$ , and considering the status of the space at the previous measure obtained at time  $t - 1$ :

$$Q_k(t) = \begin{cases} 1 & \text{if } P_k(t) \geq \varepsilon_2 \text{ or } (P_k(t) > \varepsilon_1 \text{ and } Q_k(t-1) = 1) \\ 0 & \text{if } P_k(t) \leq \varepsilon_1 \text{ or } (P_k(t) < \varepsilon_2 \text{ and } Q_k(t-1) = 0) \end{cases} \quad (2)$$

The thresholds  $\varepsilon_1, \varepsilon_2$  are set to a common value for all the WSC and the parking spaces. The status  $Q_k(t) = 1$  denotes that the ROI  $R_k$  is busy, while the zero value means that the space is available.

When a parking space is monitored by more than one WSC, the final decision regarding its occupancy can be obtained also in a cooperative way, at an inter-node level. In particular, the final decision can be obtained aggregating all the beliefs produced by the different WSC (which are statically dislocated and have static tables of the monitored parking spaces) before determining the status by applying Eq. 2.

More in detail, if a parking space  $k$  is monitored by  $n = n(k)$  cameras, and being  $P_k^1(t), \dots, P_k^n(t)$  the beliefs provided by each single camera at time  $t$ , then the aggregated belief  $\bar{P}_k(t)$  is computed as:

$$\bar{P}_k(t) = \sum_{i=1}^n \omega_{i,k} P_k^i(t) \quad (3)$$

Where the  $\omega_{i,k}$  are the non-negative weights and

$$\sum_{i=1}^n \omega_{i,k} = 1 \quad (4)$$

The weights  $\omega_{i,k}$  are determined heuristically according to the goodness of the view from camera  $i$  of the parking space  $k$ . Practically, if the views are not excessively skewed, weighting by the normalized area in pixel of the various ROI can provide an acceptable weight initialization. The aggregated status of a parking space can be obtained by applying Eq. 2 to the aggregated belief  $\bar{P}_k(t)$ .

#### 4 RESULTS

The scenario used to test and evaluate the proposed solution was selected in the context of a project funded by the Foundation *Cassa di Risparmio di Lucca* in collaboration with the company *Metro S.r.l.* who is a concession holder for the municipality of Lucca for the design, construction and management of integrated parking systems and areas for vehicle parking in Lucca. The city of Lucca has the peculiarity of being enclosed by the famous intact Renaissance-era city walls. Within the walls some paying parking are available, both enclosed, street-side and curb-parking, but the vehicle circulation is only admitted for residents or access to those parking lots. The main goal of the experimentation was to monitor the availability of these parking avoiding cars to travel around and entering the streets inside the walls without the possibility to find a parking space. After preliminary evaluations, the case study location has been selected as the parking area on *Via del Pallone* right within the walls of the city. As can be seen from Figure 3, in this scenario three rows of parallel parking spaces are monitored. This parking has several peculiarities: it is a street side parking (blue part in Fig. 3 is the one-way road), with a row separated from the others by the road, and parallel oblique parking spaces having different entrance and direction.

From a methodological point of view other peculiarities arise: due to the historical position of this area only few nodes could be deployed and had to be anchored on existing structures; the position of the monitoring cameras was sub-optimal also with respect to the height over the area. This latter constraint has placed a further difficulty from the point of view of the occlusion caused by the position of the parking stalls compared to available viewpoints. In Figure 4 a sample view from a deployed camera can be seen with on overlay of the resulting processing showing available and occupied spaces. As mentioned above in this figure the occlusion example can be seen: the leftmost yellow space is occupied by a van, that is partially occluding the view on the leftmost green space.

These constraints brought to a careful design of the attention and monitoring areas (i.e. the above mentioned ROI) of single spaces; particularly in the example of Figure 4, although there is a partial occlusion, the monitoring area actually occupied (green quadrilateral) from the vehicle in upper left space covers around 70% of the size of the area. Thus, the adaptive background model has been defined (i.e. the ROI positioning) and computed taking into account possible

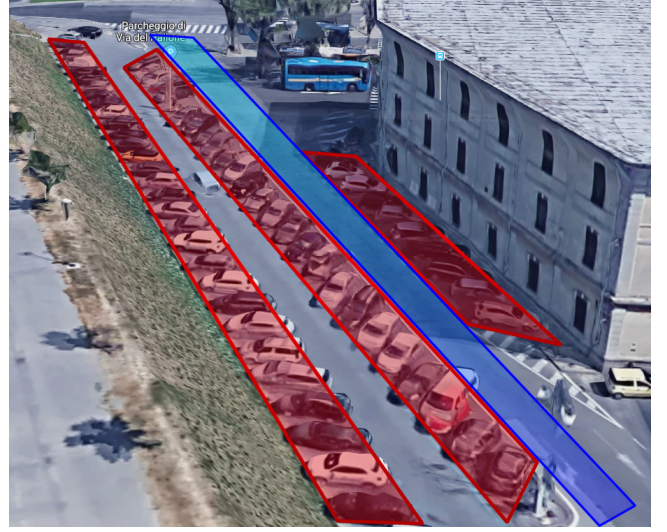


Figure 3: Case study scenario a monitored parking lot within the wall of the city of Lucca.




Figure 4: Sample of the interface with a view from a smart camera and the visualization of available and occupied parking spaces.

occlusions, up until the limits of a reduction in the detection ratio. A detail of this situation is shown in Figure 5.

#### 4.1 Experimental evaluation

The Overall Error Rate (OER) is the metric proposed in [6] and is defined as the ratio of total errors (i.e., False Positive plus False Negative) and the total responses (i.e., False Positive plus False Negative plus True Positive plus True Negative):

$$OER = \frac{FP + FN}{FP + FN + TP + TN} \quad (5)$$

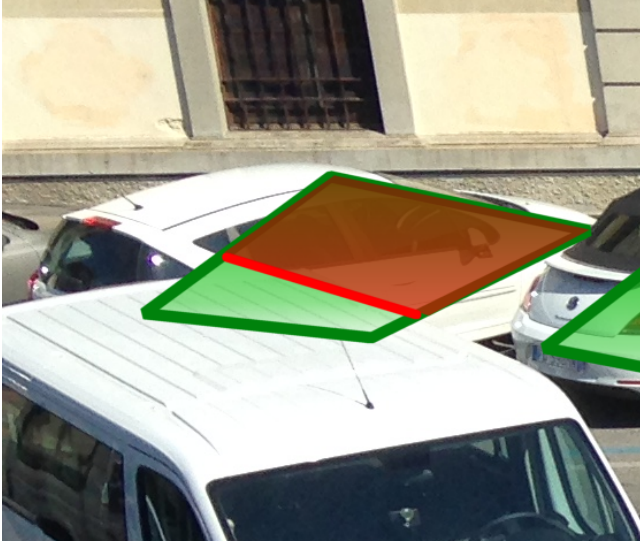

**Figure 5: Detail showing the overlapping and occlusion of a parking space with the portion belonging to the actual occupying vehicle.**

The method operates at frame level, meaning the output of the algorithm being the status of each space (i.e. available or occupied) based on the analysis of a single image; the lightweight image analysis, instead, is a time-related system. In order to compare the two methods, it seems reasonable to consider the output of each individual frame as a complete set of space states; thus the denominator can be considered as the multiplication of the spaces monitored and the total number frames analyzed:


$$ER = \frac{\sum_{i=1}^{Tot} (FP_i + FN_i)}{Tot * Spaces} \quad (6)$$

where  $FP_i + FN_i$  is the total number of errors made when analyzing frame  $i$ ,  $Tot$  is the total number of frames analyzed and  $Spaces$  is the total number of parking spaces monitored.

The total number of parking spaces analyzed in this experiment regarding the city of Lucca is 77, the spaces are located in the areas shown in Figure 3. Three of these parking spaces were reserved for disabled car parking. In total, for this first experimentation, a total of two days (from 9 AM to 7 PM) of acquisition were performed. The analysis was not performed at night in consideration of the fact that parking in these hours is free and unmonitored.

The average error rate achieved by the presented method is 0.65%. Although a number of papers in literature have been presented on the topic, a fair comparison is difficult to be conducted, since most of the approaches are far from being based on a *low-cost embedded platform*. Yet, their performance is not radically different from the one achieved by our methods, as an example, in [2] their method achieves an error rate of 0.4% while being based on high-end computing devices.

In the following Figure 6 a sample of three extracted frames from a single data-set is shown with the detection of new vehicles occupying available spaces.

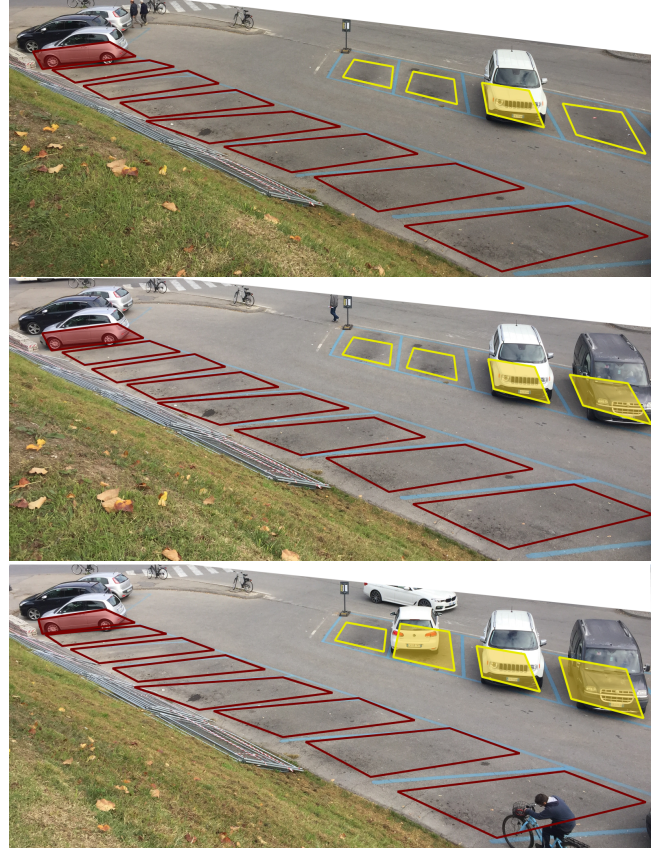

**Figure 6: Sample of three frames with new detected vehicles occupying available spaces.**

## 5 CONCLUSIONS

In the frame of a reduction of urban pollution through traffic reduction, in this paper we propose an improvement to the monitoring of urban traffic and towards an increased smart cities capability. One of the goal, especially in historically sensible urban environment is the possibility (which is often a strict constraint) to use existing infrastructures and do not endanger the aesthetic aspect of the urban landscape. In this paper, we have presented a fully scalable and distributed architecture that is easily integrated with multiple sensing sources, and which is deployed in an urban environment exploiting existing infrastructures. One further evaluation which is planned for a next experimental session, is the measuring of results with an increased number of cameras and the computation of the same overlapping parking spaces as seen from different cameras. This feature is particularly effective when dealing with occluded vision (see Figure 5 as an example).

## ACKNOWLEDGMENTS

The research leading to these results has received funding from the project SmartPark@Lucca funded by the Foundation Cassa di Risparmio di Lucca.

## REFERENCES

- [1] Muhammad Alam, Davide Moroni, Gabriele Pieri, Marco Tampucci, Miguel Gomes, José Fonseca, and Joaquim Ferreira. 2018. Real-Time Smart Parking Systems Integration in Distributed ITS for Smart Cities. *Journal of Advanced Transportation* 2018 (2018).
- [2] João Miguel Pereira de Almeida, Joaquim Castro Ferreira, et al. 2016. Development of an ITS-G5 station, from the physical to the MAC layer. *Intelligent Transport Systems: from Good Practice to Standards I* (2016), 1–37.
- [3] Giuseppe Amato, Paolo Barsocchi, Fabrizio Falchi, Erina Ferro, Claudio Gennaro, Giuseppe Riccardo Leone, Davide Moroni, Ovidio Salvetti, and Claudio Vairo. 2018. Towards Multimodal Surveillance for Smart Building Security. In *Multidisciplinary Digital Publishing Institute Proceedings*, Vol. 2. 95.
- [4] Giuseppe Amato, Paolo Bolettieri, Fabio Carrara, Luca Ciampi, Claudio Gennaro, Giuseppe Riccardo Leone, Davide Moroni, Gabriele Pieri, and Claudio Vairo. 2018. A wireless smart camera network for parking monitoring. In *2018 Global Communications Conference (GLOBECOM). Workshop on COoperative Sensing for Smart MObility (COSSMO)*. IEEE.
- [5] Richard Arnott and Parker Williams. 2017. Cruising for parking around a circle. *Transportation research part B: methodological* 104 (2017), 357–375.
- [6] Paulo RL De Almeida, Luiz S Oliveira, Alceu S Britto Jr, Eunelson J Silva Jr, and Alessandro L Koerich. 2015. PKLot—A robust dataset for parking lot classification. *Expert Systems with Applications* 42, 11 (2015), 4937–4949.
- [7] Mark Deakin. 2011. The embedded intelligence of smart cities. *Intelligent Buildings International* 3, 3 (2011), 189–197. <https://doi.org/10.1080/17508975.2011.579340> arXiv:<https://doi.org/10.1080/17508975.2011.579340>
- [8] Andrea Fantini, Matteo Fiorucci, and Salvatore Martino. 2017. Rock Falls Impacting Railway Tracks: Detection Analysis through an Artificial Intelligence Camera Prototype. *Wireless Communications and Mobile Computing* 2017 (2017).
- [9] Andrea Fantini, Massimo Magrini, Salvatore Martino, Davide Moroni, Gabriele Pieri, Alberto Prestininzi, and Ovidio Salvetti. 2015. Experimenting an Embedded-sensor Network for Early Warning of Natural Risks Due to Fast Failures along Railways.. In *IMTA*. 85–91.
- [10] Yanfeng Geng and Christos G Cassandras. 2012. A new “smart parking” system infrastructure and implementation. *Procedia-Social and Behavioral Sciences* 54 (2012), 1278–1287.
- [11] C. C. Huang, Y. S. Tai, and S. J. Wang. 2013. Vacant Parking Space Detection Based on Plane-Based Bayesian Hierarchical Framework. *IEEE Transactions on Circuits and Systems for Video Technology* 23, 9 (Sept 2013), 1598–1610. <https://doi.org/10.1109/TCSVT.2013.2254961>
- [12] Amir O Kothb, Yao-Chun Shen, Xu Zhu, and Yi Huang. 2016. iParker-A New Smart Car-Parking System Based on Dynamic Resource Allocation and Pricing. *IEEE Trans. Intelligent Transportation Systems* 17, 9 (2016), 2637–2647.
- [13] Giuseppe Riccardo Leone, Massimo Magrini, Davide Moroni, Gabriele Pieri, Ovidio Salvetti, and Marco Tampucci. 2016. A smart device for monitoring railway tracks in remote areas. In *Computational Intelligence for Multimedia Understanding (IWCIM), 2016 International Workshop on*. IEEE, 1–5.
- [14] Giuseppe Riccardo Leone, Davide Moroni, Gabriele Pieri, Matteo Petracca, Ovidio Salvetti, Andrea Azzarà, and Francesco Marino. 2017. An Intelligent Cooperative Visual Sensor Network for Urban Mobility. *Sensors* 17, 11 (2017), 2588.
- [15] Massimo Magrini, Davide Moroni, Giovanni Palazzese, Gabriele Pieri, Giuseppe Leone, and Ovidio Salvetti. 2015. Computer vision on embedded sensors for traffic flow monitoring. In *Intelligent Transportation Systems (ITSC), 2015 IEEE 18th International Conference on*. IEEE, 161–166.
- [16] Massimo Magrini, Davide Moroni, Giovanni Palazzese, Gabriele Pieri, Ovidio Salvetti, Daniele Azzarelli, and Antonio Spada. 2015. An Infrastructure for Integrated Management of Urban Railway Crossing Areas. In *Intelligent Transportation Systems (ITSC), 2015 IEEE 18th International Conference on*. IEEE, 42–47.
- [17] SA Mahmud, GM Khan, M Rahman, H Zafar, et al. 2013. A survey of intelligent car parking system. *Journal of applied research and technology* 11, 5 (2013), 714–726.
- [18] Jong-Ho Shin and Hong-Bae Jun. 2014. A study on smart parking guidance algorithm. *Transportation Research Part C: Emerging Technologies* 44 (2014), 299–317.
- [19] Donald C. Shoup. 2011. *The high cost of free parking*. Vol. 7. American Planning Association, Routledge (Taylor & Francis Group).
- [20] USB Implementers Forum, Inc. 2012. USB Device Class Definition for Video Devices - Revision 1.5. <https://www.usb.org/document-library/video-class-v15-document-set>
- [21] Hongwei Wang and Wenbo He. 2011. A reservation-based smart parking system. In *Computer Communications Workshops (INFOCOM WKSHPS), 2011 IEEE Conference on*. IEEE, 690–695.