



(43) International Publication Date
29 December 2016 (29.12.2016)

- (51) **International Patent Classification:**
H01L 51/42 (2006.01) *C07C 211/61* (2006.01)
H01L 51/00 (2006.01)
- (21) **International Application Number:**
PCT/IB2016/053657
- (22) **International Filing Date:**
20 June 2016 (20.06.2016)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
15173936.4 25 June 2015 (25.06.2015) EP
- (71) **Applicant:** ECOLE POLYTECHNIQUE FEDERALE DE LAUSANNE (EPFL) [CH/CH]; EPFL-TTO, EPFL Innovation Park J, 1015 Lausanne (CH).
- (72) **Inventors:** SALIBA, Michael; Av. d'Echallens 117, 1004 Lausanne (CH). NAZEERUDDIN, Mohammad Khaja; Chemin de Montaney 10, 1024 Ecublens (CH). GRAETZEL, Michael; Chemin de Marquisat 7a, 1025 St-Sulpice (CH). DAHMEN, Klaus-Hermann; Intercontinental the City No. 603, Doha (QA). POZZI, Gianluca; Via 150 Unità d'Italia 22, 24031 Almenno San Salvatore (IT). ORLANDI, Simonetta; Via R. di Lauria 15, 20149 Milano (IT).
- (74) **Agent:** GANGUILLET, Cyril; ABREMA Agence Brevets et Marques, Ganguillet, Avenue du Théâtre 16, CP 5027, 1002 Lausanne (CH).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report (Art. 21(3))

(54) **Title:** FUNCTIONAL HOLE TRANSPORT MATERIALS FOR OPTOELECTRONIC AND/OR ELECTROCHEMICAL DEVICES


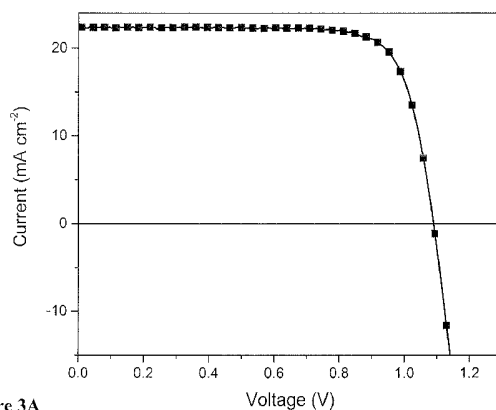


Figure 3A



(57) **Abstract:** The present invention relates to a compound of formula (I) based on a structure comprising functionalized spiro-fluorene and fused aromatics or non-aromatic rings with at least one heteroatom, and used as hole transporting material in a optoelectronic and/or photoelectrochemical device.

WO 2016/207775 A1

Functional Hole Transport Materials for Optoelectronic and/or Electrochemical Devices

Technical Field

5 The present invention relates to organic compounds, their use as hole transport materials and their use to tune HOMO level, to optoelectronic and/or electrochemical devices, in particular solar cells and solid state solar cells comprising these compounds.

Background Art and Problems Solved by the Invention

10

The conversion of solar energy to electrical current using thin film third generation photovoltaics (PV) is being widely explored for the last two decades. The sandwich/monolithic-type PV devices, consisting of a mesoporous photoanode with an organic/inorganic light harvester, redox electrolyte/solid-state hole conductor, and counter
15 electrode, have gained significant interest due to the ease of their fabrication, the flexibility in the selection of materials and the low cost effective production.

20

Recently, bulk layers of organometallic halide perovskite based on tin (CsSnX_3), or lead ($\text{CH}_3\text{NH}_3\text{PbX}_3$; X = Cl, Br, I) have been introduced pigment for light harvesting, resulting in
20 high power conversion efficiencies (PCE). These perovskite materials show exceptional characteristics: large panchromatic absorption and very good charge-carrier mobility values being comparable to the amorphous silicon. Minimizing energy losses while favoring charge-extraction rates are fundamental to take advantage of the intrinsic properties of the perovskites and to improve the efficiency.

25

Therefore, perovskite-based and other types of solid state solar cells generally contain an organic hole transport material (HTM) layer, for transporting holes created by charge separation at the light harvester to the counter electrode and/or cathode for filling up by incoming electrons, thereby closing the electric circuit and rendering the devices regenerative.

30

Currently most performing solid state device use doped Spiro-OMeTAD (2,2',7,7'-tetrakis(N,N-di-p-methoxyphenyl amine)-9,9-spirobifluorene) as a HTM. The relatively low PCE of solid state devices was often ascribed to the low hole mobility in Spiro-OMeTAD, which causes interfacial recombination losses by two orders of magnitude higher than in electrolyte-based, dye-sensitized solar cells (DSCCs). Further, the use of spiro-MeOTAD as

hole transporting material may trigger instability in such solid-state solar cells. Because Spiro-MeOTAD has two oxidation potentials being very close, this HTM in the oxidized form is able to form a di-cation, which in turn can dismutate and might cause device instability. Further, since spiro-OMeTAD compound is present in semi-crystalline form, there is the risk that it will (re)crystallize in the processed form in the solar cell. In addition, the solubility in customary process solvents is relatively low, which leads to a correspondingly low degree of pore filling. Along stability issues, the high cost due to a complicated synthetic route and the high purity that is required (sublimation grade) in order to have good performance have been the main drawbacks for commercial applications of solid state solar cells.

10

Attempts were made to find an alternate organic HTM having higher charge carrier mobility and matching HOMO level to replace Spiro-OMeTAD. In most of the cases, it is difficult to compete with the performances equivalent to Spiro-OMeTAD-based devices, due to its unique properties: sufficient hole mobility, thermal and UV stability, and well-matched HOMO (highest occupied molecular orbital) energy level to the semiconductor light absorbers.

15

More recently a number of studies indicated that the HTMs can play a key role in controlling the long-term stability of perovskites solar cell. It was demonstrated that perovskites solar cell are more stable if the organic semiconductors are replaced by carbon as HTMs. Furthermore, it was shown that employing new dopant-free organic HTMs significantly improves the device stability compared to the commonly used chemical doped spiro-OMeTAD.

20

In view of the above, the present invention addresses the disadvantage of triggering instability and reducing life-time of the device comprising perovskite due to the presence of HTM, e.g. spiro-OMeTAD.

25

The present invention also pursues to provide new hole transporting material allowing to tune HOMO level and having positive impact on the sensitizer through its passivation to improve and provide higher power conversion efficiency (PCE) to photovoltaic devices comprising perovskite as well as to further optoelectronic devices Organic Light Emitting Diodes (OLED), Field effect Transistors (FET).

30

The present invention also addresses the disadvantage of the expensive and complex synthesis

of HTMs resulting in materials of high price because of the expensive purification steps, starting material compounds, the complexity and the multiplication of reaction steps, the use of aggressive reagents. Thus the synthesis process is lengthy, time-consuming and expensive and causes non-negligible environmental impact.

5

The invention pursues to provide an efficient solar cell, which can be rapidly prepared in an efficient way, using readily available or low cost materials such as conductive material, using a short manufacturing procedure based on industrially known manufacturing step, keeping the material costs and the material impact on the environment very low.

10


The present invention addresses the problems depicted above.

Summary of the Invention

15 Remarkably, in some aspects, the present inventors have found that a compound based on a structure comprising functionalized spirofluorene and fused aromatics or non-aromatic rings with at least one heteroatom contributes to both effective charge extraction (HTM function) and photocurrent enhancement (passivation of the perovskite layer, good electron transmission performance and cavity transmission performance) in a solid photovoltaic device
20 and improves the PCE of optoelectronic and/or photoelectrochemical device, and in particular optoelectronic and/or photoelectrochemical device comprising perovskite pigment as sensitizer. They are non-planar efficient conjugate structure

Although their large size, said compounds are good soluble in organic solvents, which greatly
25 facilitates their purification and processing and their application or deposition on the sensitizer layer in the solid photovoltaic device.

The present invention provides a compound of formula (I)

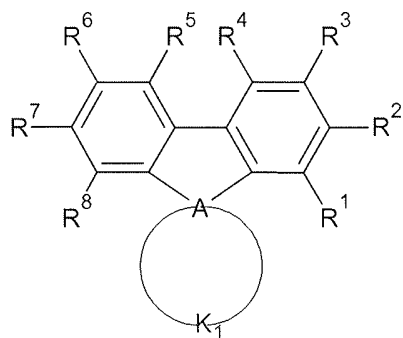


(I),

wherein A is selected from Si or C atom; wherein at least one substituent R^1 , R^2 , R^3 , R^4 , R^5 , R^6 , R^7 and R^8 is independently selected from substituents comprising 1-50 carbons, 1-20 heteroatoms being selected from O, S, N, and 0-2 P-hydrocarbyl, from halogen being selected from Cl, F, Br, from C1-C30 alkyl, C1-C30 heteroalkyl, C4-C20 aryl group, C4-C20 heteroaryl group, C4-C30 alkylaryl group, C4-C30 aryloxy group or C4-C20 heteroaryloxy group, wherein the heteroatom is selected from O, S, Se, N and $-P(=O)-$, from $-C\equiv N$, and wherein alkyl, heteroalkyl, alkylaryl if they comprise 3 or more carbons, may be linear, branched or cyclic; and wherein any one of R^1 , R^2 , R^3 , R^4 , R^5 , R^6 , R^7 or R^8 being different from said substituents as defined above is H; and wherein K_1 is a conjugated system or a system of fused aromatic rings or fused non-aromatic rings comprising at least one heteroatom being selected from O, S and N, preferably from O, S, and N, wherein said aromatic rings may be further substituted by substituents being independently selected from H, and substituents as defined above for R^1 , R^2 , R^3 , R^4 , R^5 , R^6 , R^7 or R^8 .

15

In an aspect, the present invention provides a compound of formula (I)

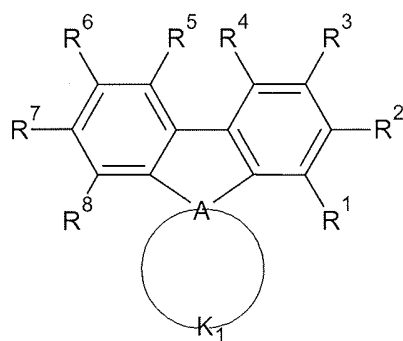

(I),

wherein

20


A is selected from Si or C atom;

R^1 , R^2 , R^3 , R^4 , R^5 , R^6 , R^7 and R^8 is independently selected from H, substituents comprising 1-50 carbons, 0-2 P-hydrocarbyl group, 1-20 heteroatoms being selected from O,

S, N, from halogen being selected from Cl, F, Br, from C1-C30 alkyl, C1-C30 heteroalkyl, C4-C20 aryl group, C4-C20 heteroaryl group, C4-C30 alkylaryl group, C4-C30 aryloxy group or C4-C20 heteroaryloxy group, wherein the heteroatom is selected from O, S, Se, N and – P(=O)-, from -C≡N, and wherein alkyl, heteroalkyl, alkylaryl if they comprise 3 or more
5 carbons, may be linear, branched or cyclic;

at least one R¹, R², R³, R⁴, R⁵, R⁶, R⁷ and R⁸ is different from H;

at least one R¹, R², R³, R⁴, R⁵, R⁶, R⁷ or R⁸ being different from H atom is independently selected from a substituent of formula (1)

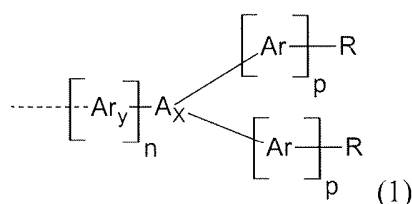

10 wherein

n and p is an integer selected from 0, 1 or 2;

A_x is selected from N or P(=O);

Ar_y and Ar are independently selected from a monocyclic system or a polycyclic system comprising fused aromatic rings or conjugated monocyclic aromatic rings, said ring
15 comprising 0, 1 or 2 heteroatoms being selected from O, S and N, and is further substituted in addition to R by other substituents independently selected from H, halogen, C1-C10 alkyl, C1-C10 alkoxy group, C1-C10 alkylthio (-S-alkyl) and -C≡N;

R is selected from H, R₁, -NR₁R₂, -O-R₁, -P(=O) R₁R₂, -S-R₁, or halogen, wherein R₁ and R₂ are independently selected from C4-C20 aryl, C4-C20 heteroaryl, C4-C20 aryloxy
20 group, C4-C20 heteroaryloxy group, C4-C20 alkoxyaryl, C4-C20 alkoxyheteroaryl, C4-C20 aryl aryloxy group, C4-C20 heteroaryl aryloxy group, C1-C20 alkyl, C1-C20 alkoxy group, C1-C20 alkoxyalkyl, C1-C20 alkylthio, C2-C20 alkenyl and C2-C20 alkynyl, wherein said alkyl, alkoxy, alkoxyalkyl, alkenyl and alkynyl, if they comprise 3 or more carbons, may be linear, branched or cyclic and wherein aryl, heteroaryl, alkyl, alkenyl, alkynyl may be further
25 substituted by alkoxy group, alkylthio group and alkyl; and wherein any one of R¹, R², R³, R⁴, R⁵, R⁶, R⁷ or R⁸ being different from said substituents as defined above is H;

K₁ is a conjugated system or a system of fused aromatic rings or fused non-aromatic rings comprising at least one heteroatom being selected from O, S and N, preferably from O, S, and N, wherein said aromatic rings may be further substituted by substituents being

independently selected from H, and substituents being different from H as defined above for R¹, R², R³, R⁴, R⁵, R⁶, R⁷ or R⁸.

5 In an embodiment, the compound of invention is selected from a compound of formula (Ia), (Ib) or (Ic).

10 In a further embodiment, the compound of the invention being a compound of formula (Ia) is selected from a compound of formula (Id), the compound of the invention being the compound of formula (Ib) is selected from a compound of formula (Ie) and the compound of the invention being the compound of formula (Ic) is selected from a compound of formula (If).

15 In a further aspect, the invention provides a hole transporting material comprising at least one compound selected from a compound according to any one of formulae (I), (Ia), (Ib), (Ic), (Id), (Ie) and (If).

20 In another aspect, the invention provides an optoelectronic and/or photoelectrochemical device comprising at least one compound selected from a compound according to any one of formulae (I), (Ia), (Ib), (Ic), (Id), (Ie) and (If)

25 In an embodiment, the optoelectronic and/or photoelectrochemical device of the invention is selected from an organic photovoltaic device, a photovoltaic solid state device, an p-n heterojunction, an organic solar cell, a dye sensitized solar cell, a solid state solar cell, a phototransistor, photodetector, particle detector and OLED (organic light-emitting diode).

In a particular embodiment, the optoelectronic and/or photoelectrochemical device of the invention is selected from a photovoltaic solid state device being a solid state solar cell comprising an organic-inorganic perovskite as sensitizer under the form of a layer.

30 In a further aspect, the invention provides use of a compound of the invention as a tuner of HOMO level.

Further aspects and preferred embodiments of the invention are detailed herein below and in the appended claims. Further features and advantages of the invention will become apparent

to the skilled person from the description of the preferred embodiments given below.

Brief Description of the Drawings


5 **Figure 1A** shows scheme of two strategies A and B for the synthesis of the compound of the invention HT-SO2. **Figure 1B** shows scheme of strategy A: a: Pd₂(dba)₃, ^tBu₃P, NaO^tBu, toluene, 110° C, 94% ; b: BuLi, Et₂O, -78° C; c: **3**, THF, -78° C->rt, 75%; d: FeCl₃, CHCl₃, reflux; e: TFA, CHCl₃, rt, 66%. **Figure 1C** shows scheme of strategy B: a: BuLi, Et₂O, -78° C; b: **1**, THF, -78° C->rt, 80%; c: FeCl₃, CHCl₃, reflux, 80% or AcOH, HCl, reflux, 79%; d: Pd₂(dba)₃, ^tBu₃P, NaO^tBu, toluene, 110° C, 81%. **Figure 1D** shows scheme of
10 synthesis of compounds of invention from spiro compound **7** performed in strategy B: a: Ar₂NH, Pd₂(dba)₃, ^tBu₃P, NaO^tBu, toluene, 110° C. **Figure 1E** shows the specific structures of compounds of the invention being HT-SO2, HT-SO7, HT-SO8, HT-SO9, HT-SO10.
Figure 2 shows the specific structures of compounds according to the invention being HT-SO2, HT-SO4 and HT-SO6; HT-SO1 and HT-SO5 are shown for the purpose of comparison.
15 **Figures 3A, B, C and D** show the Current-Voltage curves (forward scans) of solid state solar cells comprising the compounds of the invention: HT-SO2 (**Figure 3A**), HT-SO4 (**Figure 3B**) and HT-SO6 (**Figure 3D**), and "mixed" organic-inorganic perovskite (perovskite with mixed formamidinium methylammonium cations and mixed iodine bromine anions as
20 sensitizer and HT-SO5 (**Figure 3C**) and "mixed" organic-inorganic perovskite as sensitizer for comparison.

Detailed Description of the Preferred Embodiments

25 The present invention concerns a compound of formula (I) based on a structure comprising spiro diarylamino functionalized fluorene and fused aromatics rings with at least one heteroatom contributes.

In particular, the invention concerns a compound of formula (I)

30

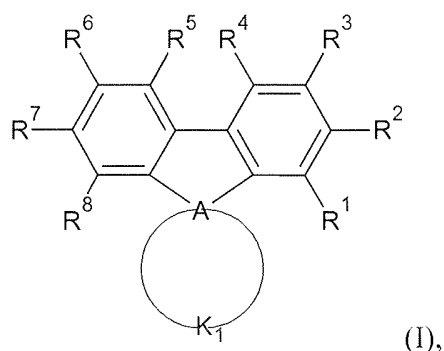


wherein

A is selected from Si or C atom;

at least one R^1 , R^2 , R^3 , R^4 , R^5 , R^6 , R^7 and R^8 is independently selected from
 5 substituents comprising 1-50 carbons, 1-20 heteroatoms being selected from O, S, N, and 0-2
 P-hydrocarbyl, from halogen being selected from Cl, F, Br, from C1-C30 alkyl, C1-C30
 heteroalkyl, C4-C20 aryl group, C4-C20 heteroaryl group, C4-C30 alkylaryl group, C4-C30
 aryloxy group or C4-C20 heteroaryloxy group, wherein the heteroatom is selected from O, S,
 Se, N and $-P(=O)-$, $-C\equiv N$, and wherein alkyl, heteroalkyl, alkylaryl if they comprise 3 or
 10 more carbons, may be linear, branched or cyclic; and wherein any one of R^1 , R^2 , R^3 , R^4 , R^5 ,
 R^6 , R^7 or R^8 being different from said substituents as defined above is H; and

K_1 is a conjugated system or a system of fused aromatics rings or fused non-aromatic
 rings comprising at least one heteroatom being selected from O, S and N, preferably from O,
 S, and N, wherein said aromatic rings may be further substituted by substituents being
 15 independently selected from H, and substituents as defined above for R^1 , R^2 , R^3 , R^4 , R^5 , R^6 ,
 R^7 or R^8 .

More particularly, the present invention provides a compound of formula (I)

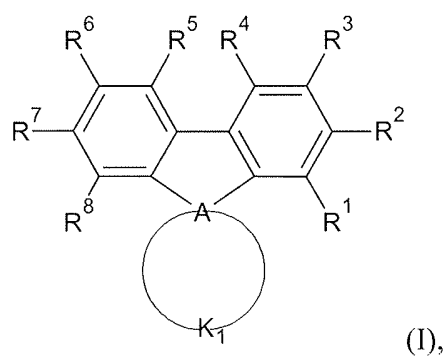

20


wherein

A is selected from Si or C atom;

$R^1, R^2, R^3, R^4, R^5, R^6, R^7$ and R^8 is independently selected from H, substituents comprising 1-50 carbons, 0-2 P-hydrocarbonyl group, 1-20 heteroatoms being selected from O, S, N, from halogen being selected from Cl, F, Br, from C1-C30 alkyl, C1-C30 heteroalkyl, C4-C20 aryl group, C4-C20 heteroaryl group, C4-C30 alkylaryl group, C4-C30 aryloxy group or C4-C20 heteroaryloxy group, wherein the heteroatom is selected from O, S, Se, N and – P(=O)-, from-C≡N, and wherein alkyl, heteroalkyl, alkylaryl if they comprise 3 or more carbons, may be linear, branched or cyclic;

at least one $R^1, R^2, R^3, R^4, R^5, R^6, R^7$ and R^8 is different from H;

at least one $R^1, R^2, R^3, R^4, R^5, R^6, R^7$ or R^8 being different from H atom is independently selected from a substituent of formula (1)

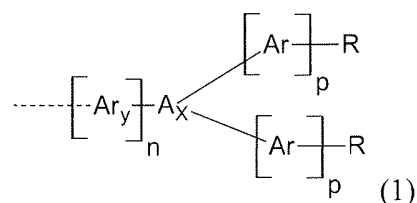

wherein

n and p is an integer selected from 0, 1 or 2;

A_X is selected from N or P(=O);

Ar_y and Ar are independently selected from a monocyclic system or a polycyclic system comprising fused aromatic rings or conjugated monocyclic aromatic rings, said ring comprising 0, 1 or 2 heteroatoms being selected from O, S and N, and is further substituted in addition to R by other substituents independently selected from H, halogen, C1-C10 alkyl, C1-C10 alkoxy group, C1-C10 alkylthio (-S-alkyl) and -C≡N;

R is selected from H, R_1 , $-\text{NR}_1\text{R}_2$, $-\text{O}-\text{R}_1$, $-\text{P}(=\text{O}) \text{R}_1\text{R}_2$, $-\text{S}-\text{R}_1$, or halogen, wherein R_1 and R_2 are independently selected from C4-C20 aryl, C4-C20 heteroaryl, C4-C20 aryloxy group, C4-C20 heteroaryloxy group, C4-C20 alkoxyaryl, C4-C20 alkoxyheteroaryl, C4-C20 aryl aryloxy group, C4-C20 heteroaryl aryloxy group, C1-C20 alkyl, C1-C20 alkoxy group, C1-C20 alkoxyalkyl, C1-C20 alkylthio, C2-C20 alkenyl and C2-C20 alkynyl, wherein said alkyl, alkoxy, alkoxyalkyl, alkenyl and alkynyl, if they comprise 3 or more carbons, may be linear, branched or cyclic and wherein aryl, heteroaryl, alkyl, alkenyl, alkynyl may be further substituted by alkoxy group, alkylthio group and alkyl; and wherein any one of $R^1, R^2, R^3, R^4, R^5, R^6, R^7$ or R^8 being different from said substituents as defined above is H;

K_1 is a conjugated system or a system of fused aromatic rings or fused non-aromatic rings comprising at least one heteroatom being selected from O, S and N, preferably from O,

S, and N, wherein said aromatic rings may be further substituted by substituents being independently selected from H, and substituents being different from H as defined above for R¹, R², R³, R⁴, R⁵, R⁶, R⁷ or R⁸.

- 5 A is an integral part from the conjugated system or the system of fused aromatic or non-aromatic rings. Preferably A is C atom.

Said fused aromatic rings may be derived from two fused C4-C7 or C4-C6 hetero-aromatic or non-aromatic hetero-rings.

10

In a further embodiment, K₁ is a conjugated system or a system of fused aromatics rings or fused non-aromatic rings comprising at least one heteroatom being selected from O, S and N, preferably from O, S, and N, more preferably from N and S, wherein said aromatic rings may be substituted by substituent being independently selected from H, substituents comprising 1-
15 50 carbons, 1-20 heteroatoms being selected from O, S, N, and 0-2 P-hydrocarbyl, from halogen being selected from Cl, F, Br, from C1-C30 alkyl, C1-C30 heteroalkyl, C4-C20 aryl group, C4-C20 heteroaryl group, C4-C30 alkylaryl group, C4-C30 aryloxy group or C4-C20 heteroaryloxy group, wherein the heteroatom is selected from O, S, Se, N and -P(=O)-, from -C≡N, and wherein alkyl, heteroalkyl, alkylaryl if they comprise 3 or more carbons, may be
20 linear, branched or cyclic.

K₁ may be a conjugated system or a system of fused aromatics rings or fused non-aromatic rings comprising at least one heteroatom being selected from O, S and N, preferably from O, S, and N, more preferably from N and S, wherein said aromatic rings may be substituted by
25 H, halogen being selected from Cl, F, Br, by C1-C30 alkyl or C1-C30 heteroalkyl, wherein the heteroatom is selected from O, S, Se, N and -P(=O)-, by -C≡N, by C4-C20 aryl, C4-C20 heteroaryl group, C4-C30 alkylaryl group, C4-C30 aryloxy group or C4-C20 heteroaryloxy group, wherein alkyl, heteroalkyl, alkylaryl if they comprise 3 or more carbons, may be
linear, branched or cyclic

30

In another embodiment, said at least one R¹, R², R³, R⁴, R⁵, R⁶, R⁷ and R⁸ is independently selected from substituents comprising 1-50 carbons, 1-20 heteroatoms being selected from O, S, N, and 0-2 P-hydrocarbyl, said substituents being further substituted by substituents selected from H, halogen, C1-C10 alkyl, C1-C10 alkoxy group, C1-C10 alkylthio (-S-alkyl)



and $-C\equiv N$ and wherein any one of $R^1, R^2, R^3, R^4, R^5, R^6, R^7$ or R^8 being different from said substituents comprising 1-50 carbons, 1-20 heteroatoms and 0-2 P-hydrocarbyl is H.

5 Preferably K_1 is selected from a system comprising fused aromatic rings or fused non-aromatic rings comprising at least one heteroatom being selected from O, S and N, preferably from O, S, and N, more preferably from N and S, wherein said aromatic rings may be substituted by substituent being independently selected from H, substituents comprising 1-50 carbons, 1-20 heteroatoms being selected from O, S, N, and 0-2 P-hydrocarbyl, from halogen being selected from Cl, F, Br, from C1-C30 alkyl, C1-C30 heteroalkyl, C4-C20 aryl group, 10 C4-C20 heteroaryl group, C4-C30 alkylaryl group, C4-C30 aryloxy group or C4-C20 heteroaryloxy group, wherein the heteroatom is selected from O, S, Se, N and $-P(=O)-$, from $-C\equiv N$, and wherein alkyl, heteroalkyl, alkylaryl if they comprise 3 or more carbons, may be linear, branched or cyclic.


15 In another embodiment, K_1 is a conjugated system or a system of fused aromatics rings or fused non-aromatic rings comprising at least one heteroatom being selected from O, S and N, preferably from O, S, and N, more preferably from N and S, wherein said aromatic rings may be substituted by H, halogen being selected from Cl, F, Br, by C1-C30 alkyl or C1-C30 heteroalkyl, wherein the heteroatom is selected from O, S, Se, N and $-P(=O)-$, by $-C\equiv N$, by 20 C4-C20 aryl, C4-C20 heteroaryl group, C4-C30 alkylaryl group, C4-C30 aryloxy group or C4-C20 heteroaryloxy group, wherein alkyl, heteroalkyl, alkylaryl if they comprise 3 or more carbons, may be linear, branched or cyclic, and by 0, 1 or 2 substituents selected from an amino group, P-hydrocarbyl or a mono- or polycyclic system comprising fused aromatic rings or monocyclic aromatic rings bound together by covalent bond, said ring comprising 0, 1 or 2 25 heteroatoms being selected from O, S and N, and wherein said amino group, said P-hydrocarbyl and said mono- or polycyclic group may further substituted by H, halogen, R_1 , $-NR_1R_2$, $-O-R_1$, $-P(=O)R_1R_2$, or $-S-R_1$, , wherein R_1 and R_2 are independently selected from C4-C20 aryl, C4-C20 heteroaryl, C4-C20 aryloxy group, C4-C20 heteroaryloxy group, C4-C20 alkoxyaryl, C4-C20 alkoxyheteroaryl, C4-C20 aryl aryloxy group, C4-C20 heteroaryl 30 aryloxy group, C1-C20 alkyl, C1-C20 alkoxy group, C1-C20 alkoxyalkyl, C1-C20 alkylthio, C2-C20 alkenyl and C2-C20 alkynyl wherein said alkyl, alkoxy, alkoxyalkyl, alkenyl and alkynyl, if they comprise 3 or more carbons, may be linear, branched or cyclic or optionally fluorinated.

In a further embodiment, K_1 is a conjugated system or a system of fused aromatics rings or fused non-aromatic rings comprising at least one heteroatom being selected from O, S and N, preferably from O, S, and N, more preferably from N and S, wherein said aromatic rings may be substituted by H.

In an embodiment, the compound of formula (I) is selected from a compound of formula (Ia), (Ib) or (Ic)

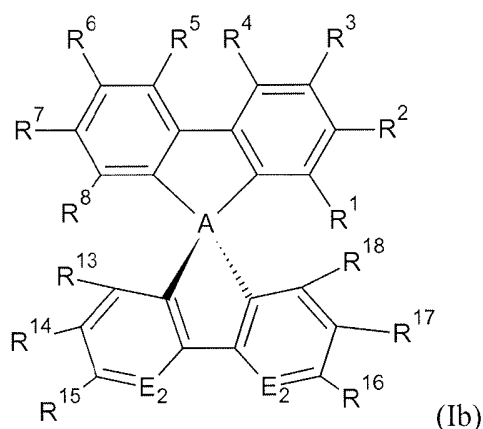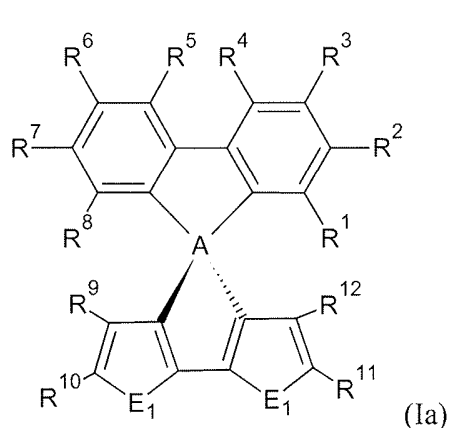

10

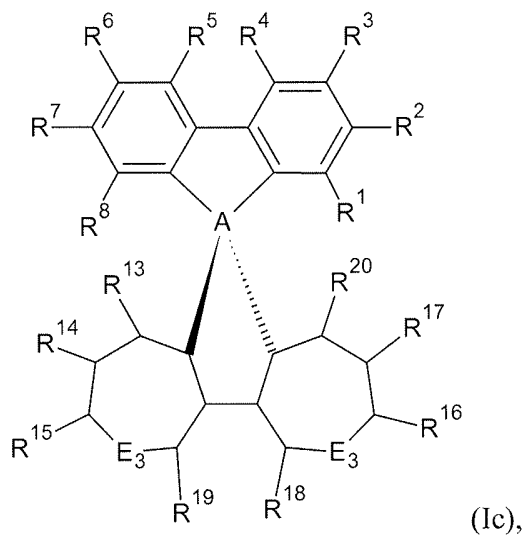

wherein

E_1 is selected from O, S and N, E_2 is selected from OR^{22} or SR^{22} , R^{22} being selected from BF_4^- , PF_6^- , $CF_3SO_3^-$ and halogen $^-$ being selected from Cl^- , F^- , Br^- , or I^- , E_3 is selected from O, S, NR^{21} or N according to the valence, wherein R^{21} is independently selected from H,


halogen being selected from Cl, F, Br, or I, from C1-C30 alkyl, C1-C30 heteroalkyl, C4-C30 aryl and C4-C30 heteroaryl, the heteroatom being selected from O, S, and N;

$R^1, R^2, R^3, R^4, R^5, R^6, R^7$ or R^8 are independently selected from substituent as defined above; and


- 5 $R^9, R^{10}, R^{11}, R^{12}, R^{13}, R^{14}, R^{15}, R^{16}, R^{17}, R^{18}, R^{19}$ and R^{20} are independently selected from H, halogen being selected from Cl, F, Br, or I, from $-C\equiv N$, C1-C30 alkyl, C1-C30 heteroalkyl, C4-C20 aryl, C4-C20 heteroaryl, C4-C30 alkylaryl group, C4-C30 aryloxy group or C4-C20 heteroaryloxy group wherein the heteroatom is selected from O, S, N and $-P(=O)-$, preferably from O, S, and N, more preferably from O and S, wherein alkyl, heteroalkyl, 10 alkylaryl if they comprise 3 or more carbons, may be linear, branched or cyclic, and from a substituent being different from H as defined above for $R^1, R^2, R^3, R^4, R^5, R^6, R^7$ or R^8 .

- In a further embodiment, E_1 is selected from O, S and N, preferably from O and S, E_2 is selected from OR^{22} or SR^{22} , R^{22} being selected from BF_4^- , PF_6^- , $CF_3SO_3^-$ and halogen $^-$ being 15 selected from Cl^- , F^- , Br^- , or I^- , E_3 is selected from NR^{21} or N in respect with valence, preferably NR^{21} , wherein R^{21} is independently selected from H, halogen being selected from Cl, F, Br, or I, from C1-C12 alkyl, C1-C12 heteroalkyl, C4-C12 aryl and C4-C12 heteroaryl, the heteroatom being selected from O, S, and N.

- 20 The fused C6 heterorings of the compound of formula (Ic) are not aromatic. Formula (Ic) represents one form of said fused C6 heterorings. Formula (Ic) is not limited to the above-represented structure of the fused C6 non-aromatic heterorings and may encompass the following structures:

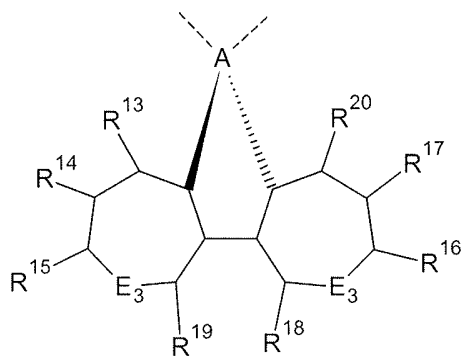


(Ic.a)

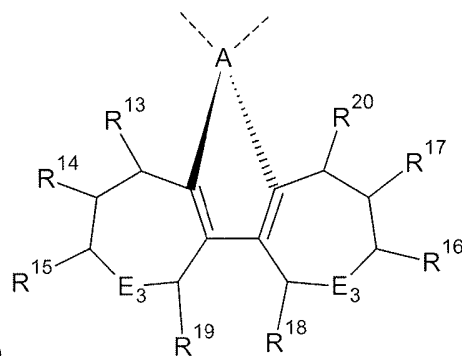

(Ic.b)

25

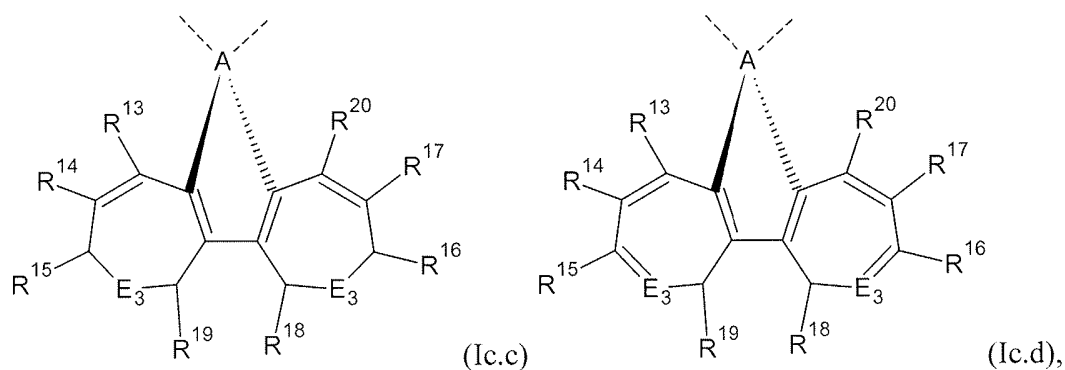

wherein

the dotted lines represent the bond to the spiro-fluorene moiety,

5 E_3 and R^{13} , R^{14} , R^{15} , R^{16} , R^{17} , R^{18} , R^{19} and R^{20} are defined as above and E_3 of the structure (Ic.c) is N according to the valence. In particular the fused non-aromatic C6 heterorings in the formula (Ic) encompasses any one of formulae (Ic.a), (Ic.b) and (Ic.c), preferably (Ic.a).

Preferably R^{21} is H.

10 All E_1 moieties in the compound of formula (Ia) may be different or identical, preferably identical. All E_2 moieties in the compound of formula (Ib) may be different or identical, preferably identical.

15 R^9 , R^{10} , R^{11} , R^{12} , R^{13} , R^{14} , R^{15} , R^{16} , R^{17} , R^{18} , R^{19} and R^{20} of the compounds of formula (Ia), (Ib) and/or formula (Ic) may be substituted by substituents independently selected from H, halogen, cyano group, C1-C20 cyanoalkyl group, C1-C20 alkyl, C1-C20 alkoxy group, C1-C20 alkoxyalkyl, C1-C20 haloalkyl group, C1-C20 haloalkoxyalkyl, wherein said cyanoalkyl, alkyl, alkoxy, alkoxyalkyl, haloalkyl, haloalkoxyalkyl, if they comprise 3 or more carbons, may be linear, branched or cyclic, wherein halogen is selected from Cl, F, Br, or I.

20

Preferably cyanoalkyl, alkyl, alkoxy, alkoxyalkyl, haloalkyl, haloalkoxyalkyl being substituents of R^9 , R^{10} , R^{11} , R^{12} , R^{13} , R^{14} , R^{15} , R^{16} , R^{17} , R^{18} , R^{19} and R^{20} of the compounds of formula (Ia), (Ib) and/or formula (Ic) are selected from hydrocarbon, hydrocarbyl, heterocarbon or heterocarbyl containing from 1 to 16 carbons, 1 to 12 carbons, 1 to 9 carbons, 25 1 to 6 carbons and may contain 0-10 heteroatom and 0-1 halogen being selected from Cl, F, Br or I, and, if they comprise 3 or more carbons, they may be linear, branched or cyclic, preferably linear or branched.

In other embodiment, at least one $R^9, R^{10}, R^{11}, R^{12}, R^{13}, R^{14}, R^{15}, R^{16}, R^{17}, R^{18}, R^{19}$ and R^{20} are independently selected from a substituent as defined for $R^1, R^2, R^3, R^4, R^5, R^6, R^7$ or R^8 .

In another embodiment, at least one $R^9, R^{10}, R^{11}, R^{12}, R^{13}, R^{14}, R^{15}, R^{16}, R^{17}, R^{18}, R^{19}$ and R^{20} is selected from an amino group, P-hydrocarbyl or a mono- or polycyclic system comprising fused aromatic rings or monocyclic aromatic rings bound together by covalent bond, said ring comprising 0, 1 or 2 heteroatoms being selected from O, S and N, and wherein said amino group, said P-hydrocarbyl and said mono- or polycyclic group may further substituted by H, halogen, R_1 , $-NR_1R_2$, $-O-R_1$, $-P(=O)R_1R_2$, or $-S-R_1$, wherein R_1 and R_2 are independently selected from C4-C20 aryl, C4-C20 heteroaryl, C4-C20 aryloxy group, C4-C20 heteroaryloxy group, C4-C20 alkoxyaryl, C4-C20 alkoxyheteroaryl, C4-C20 aryl aryloxy group, C4-C20 heteroaryl aryloxy group, C1-C20 alkyl, C1-C20 alkoxy group, C1-C20 alkoxyalkyl, C1-C20 alkylthio, C2-C20 alkenyl and C2-C20 alkynyl wherein said alkyl, alkoxy, alkoxyalkyl, alkenyl and alkynyl, if they comprise 3 or more carbons, may be linear, branched or cyclic.


15

In an embodiment the at least one $R^1, R^2, R^3, R^4, R^5, R^6, R^7$ and R^8 of the compound of the invention being different from H is independently selected from an amino group, P-hydrocarbyl or a mono- or polycyclic system comprising fused aromatic rings or monocyclic aromatic rings bound together by covalent bond, said ring comprising 0, 1 or 2 heteroatoms being selected from O, S and N, and wherein said amino group, said P-hydrocarbyl and said mono- or polycyclic group may further substituted by H, halogen, R_1 , $-NR_1R_2$, $-O-R_1$, $-P(=O)R_1R_2$, or $-S-R_1$, wherein R_1 and R_2 are independently selected from C4-C20 aryl, C4-C20 heteroaryl, C4-C20 aryloxy group, C4-C20 heteroaryloxy group, C4-C20 alkoxyaryl, C4-C20 alkoxyheteroaryl, C4-C20 aryl aryloxy group, C4-C20 heteroaryl aryloxy group, C1-C20 alkyl, C1-C20 alkoxy group, C1-C20 alkoxyalkyl, C1-C20 alkylthio, C2-C20 alkenyl and C2-C20 alkynyl wherein said alkyl, alkoxy, alkoxyalkyl, alkenyl and alkynyl, if they comprise 3 or more carbons, may be linear, branched or cyclic.

20
25

In a further embodiment, according to the invention, the at least one $R^1, R^2, R^3, R^4, R^5, R^6, R^7$ or R^8 of the compounds of the invention, the compounds according to any one of formulae (I), (Ia), (Ib) and (Ic) being different from H atom is independently selected from a substituent of formula (1)

30

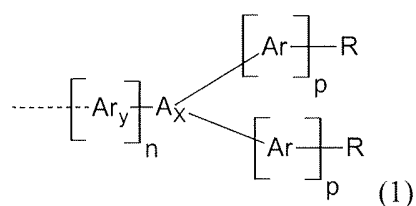

wherein

n and p is an integer selected from 0, 1 or 2;

A_X is selected from N or P(=O), preferably from N;

5 Ar_y and Ar are independently selected from a monocyclic system or a polycyclic system comprising fused aromatic rings or conjugated monocyclic aromatic rings, said ring comprising 0, 1 or 2 heteroatoms being selected from O, S and N, and is further substituted in addition to R by other substituents independently selected from H, halogen, C1-C10 alkyl, C1-C10 alkoxy group, C1-C10 alkylthio (-S-alkyl) and -C≡N;

10 R is selected from H, R_1 , $-\text{NR}_1\text{R}_2$, $-\text{O}-\text{R}_1$, $-\text{P}(=\text{O}) \text{R}_1\text{R}_2$, $-\text{S}-\text{R}_1$, or halogen, wherein R_1 and R_2 are independently selected from C4-C20 aryl, C4-C20 heteroaryl, C4-C20 aryloxy group, C4-C20 heteroaryloxy group, C4-C20 alkoxyaryl, C4-C20 alkoxyheteroaryl, C4-C20 aryl aryloxy group, C4-C20 heteroaryl aryloxy group, C1-C20 alkyl, C1-C20 alkoxy group, C1-C20 alkoxyalkyl, C1-C20 alkylthio, C2-C20 alkenyl and C2-C20 alkynyl, wherein said
 15 alkyl, alkoxy, alkoxyalkyl, alkenyl and alkynyl, if they comprise 3 or more carbons, may be linear, branched or cyclic and wherein aryl, heteroaryl, alkyl, alkenyl, alkynyl may be further substituted by alkoxy group, alkylthio group and alkyl.







The dotted line in formula (1) represents the bond by which Ar_y , if Ar_y present and n is 1 or 2,
 20 or A_X , if Ar_y is absent, is connected to the aromatic ring of the fused ring system.

Preferably n is 0 or 1 p is 1 or 2. If A_X is N, preferably n is 0 or 1 and p is 1 or 2. If A_X is P(=O), preferably n is 1 and p is 1 or 2.

25 Ar_y (Ar_{y1} and Ar_{y2}) and Ar moieties (Ar_1 and Ar_2) may be identical or different. If A_X is N, preferably n is 0 or 1, p is 1 or 2, and Ar_{y1} (if present), Ar_1 and Ar_2 (if present) are identical. If A_X is P(=O), preferably n is 1, p is 1 or 2, Ar_{y1} , Ar_1 and Ar_2 (if present) are identical or different, preferably identical.

30 In one embodiment, A_X is N.

In an embodiment, Ar_y and Ar of formula (1) are independently selected from moieties according to any one of formulae (2) to (19)

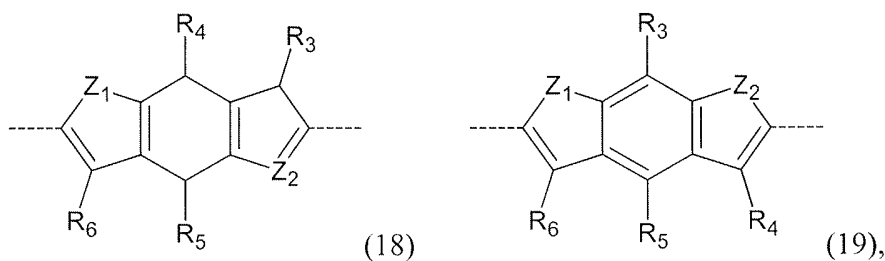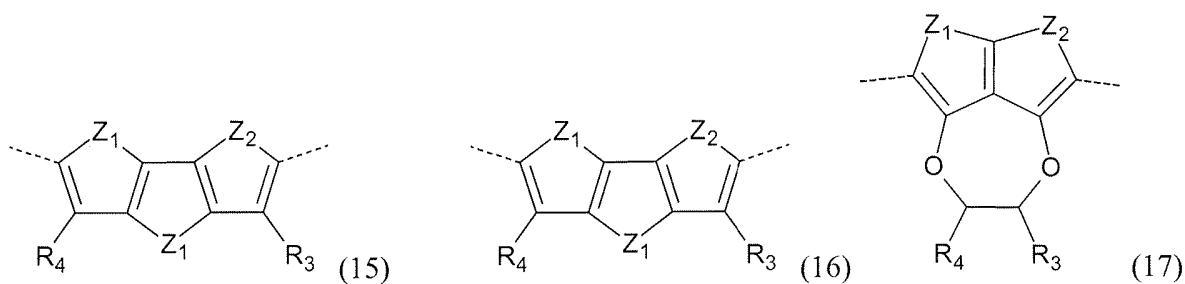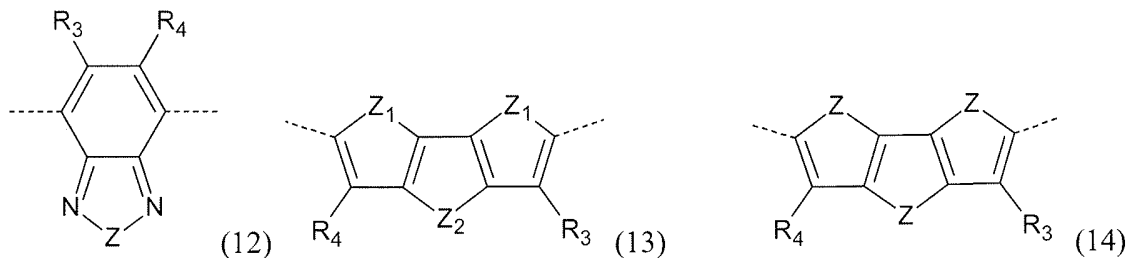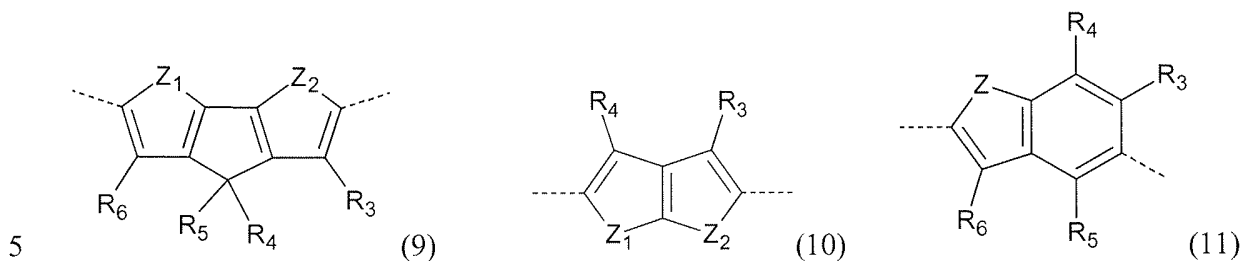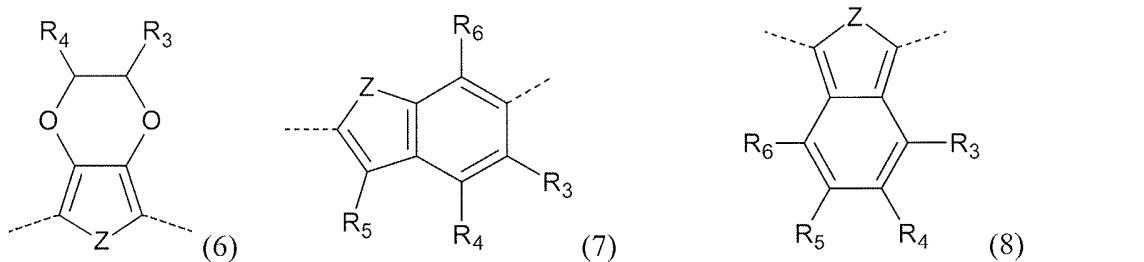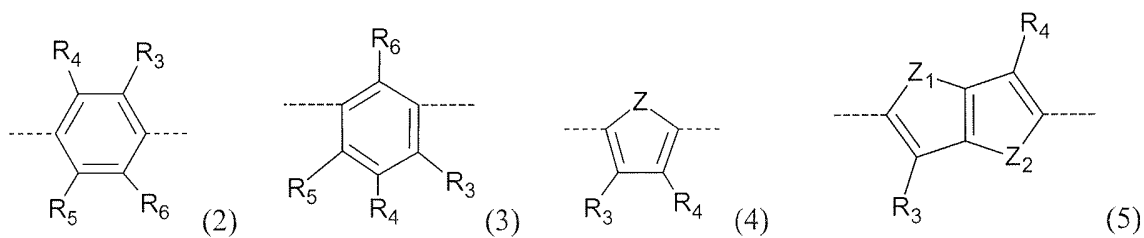

wherein

10 Z, Z₁, Z₂ are independently selected from O, S and Se atoms,

R₃, R₄, R₅ and R₆ are independently selected from H, halogen, C1-C10 alkyl, C1-C10 alkoxy group, C1-C10 alkylthio (-S-alkyl) and -C≡N.

5 The dotted lines represent the bond by which, the substituents are connected to the aromatic ring of the fused ring system and/or to another substituents and/or to the N atom and/or to the P(=O).

Preferably Z, Z₁, Z₂ are independently selected from O and S.

10 In another embodiment, and Z, Z₁ and Z₂ are different from each other when they are present in the same moiety. In particular Z₁ and Z₂ are different from each other when they are present in the same moiety.

Preferably, Ar_y and Ar are independently selected from moieties according to any one of
15 formulae (2), (3), (4), (6), (13) and (14), more preferably from moieties according to any one of formulae (2), (3), and (4), preferably (2) and (3), in particular when n is 1 and p is 2.

20 One or more R⁹, R¹⁰, R¹¹, R¹², R¹³, R¹⁴, R¹⁵, R¹⁶, R¹⁷, R¹⁸, R¹⁹ and R²⁰ are selected from a substituent as defined above for R¹, R², R³, R⁴, R⁵, R⁶, R⁷ or R⁸ being different from H (atom). One, two, three or four, preferably two R⁹, R¹⁰, R¹¹, R¹², R¹³, R¹⁴, R¹⁵, R¹⁶, R¹⁷, R¹⁸, R¹⁹ and R²⁰ are selected from a substituent as defined above for R¹, R², R³, R⁴, R⁵, R⁶, R⁷ or R⁸ being different from H (atom). Preferably R¹⁰ and R¹¹, R¹⁵ and R¹⁶, or R¹⁴ and R¹⁷ are selected from a substituent as defined above for R¹, R², R³, R⁴, R⁵, R⁶, R⁷ or R⁸ being different from H (atom).

25

In another embodiment R⁹, R¹⁰, R¹¹, R¹², R¹³, R¹⁴, R¹⁵, R¹⁶, R¹⁷, R¹⁸, R¹⁹ and R²⁰ are independently selected from H, halogen being selected from Cl, F, Br, or I, C1-C30 alkyl, C1-C30 heteroalkyl, C4-C20 aryl, C4-C20 heteroaryl, C4-C30 alkylaryl group, C4-C30 aryloxy group or C4-C20 heteroaryloxy group wherein the heteroatom is selected from O, S, N and –
30 P(=O)-, -C≡N, preferably from O, S, and N, more preferably from O and S, , wherein alkyl, heteroalkyl, alkylaryl if they comprise 3 or more carbons, may be linear, branched or cyclic, and from a substituent of formula (1) as defined above.

In a further embodiment, R^9 , R^{10} , R^{11} , R^{12} , R^{13} , R^{14} , R^{15} , R^{16} , R^{17} , R^{18} , R^{19} and R^{20} are independently selected from H and from a substituent of formula (1) as defined above. In particular at least one R^9 , R^{10} , R^{11} , R^{12} , R^{13} , R^{14} , R^{15} , R^{16} , R^{17} , R^{18} , R^{19} and R^{20} is independently selected from a substituent of formula (1) as defined above. Preferably R^{10} and R^{11} , R^9 and R^{12} , R^{15} and R^{16} , or R^{14} and R^{17} are selected from a substituent of formula (1).


In an embodiment, R^{10} and R^{11} of compound of formula (Ia), and/or R^9 and R^{12} of compound of formula (Ia), and/or R^{15} and R^{16} of a compound according to formula (Ib) or (Ic), or R^{14} and R^{17} of a compound according to formula (Ib) or (Ic) are selected from a substituent of formula (1). Preferably R^{10} and R^{11} of compound of formula (Ia), and/or R^9 and R^{12} of compound of formula (Ia), and/or R^{15} and R^{16} of a compound according to formula (Ib) or (Ic), or R^{14} and R^{17} of a compound according to formula (Ib) or (Ic) are selected from a substituent of formula (1), the substituents R^9 , R^{10} , R^{11} , R^{12} , R^{13} , R^{14} , R^{15} , R^{16} , R^{17} , R^{18} , R^{19} or R^{20} , if different from a substituent of formula (1), are H.



15

Preferably R^2 and R^7 are selected from a substituent of formula (1) as defined above.

The compound of the invention of formula (I) may be selected from a compound of formula (Id), (Ie) or (If) below:

20

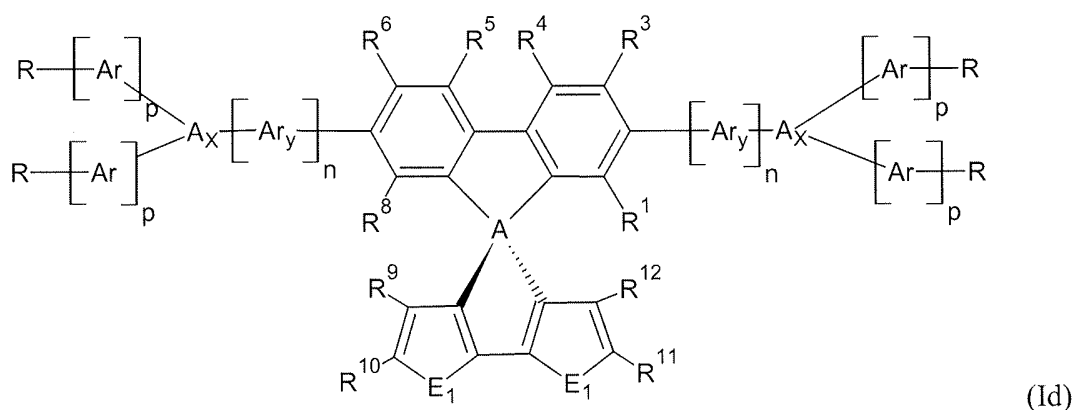

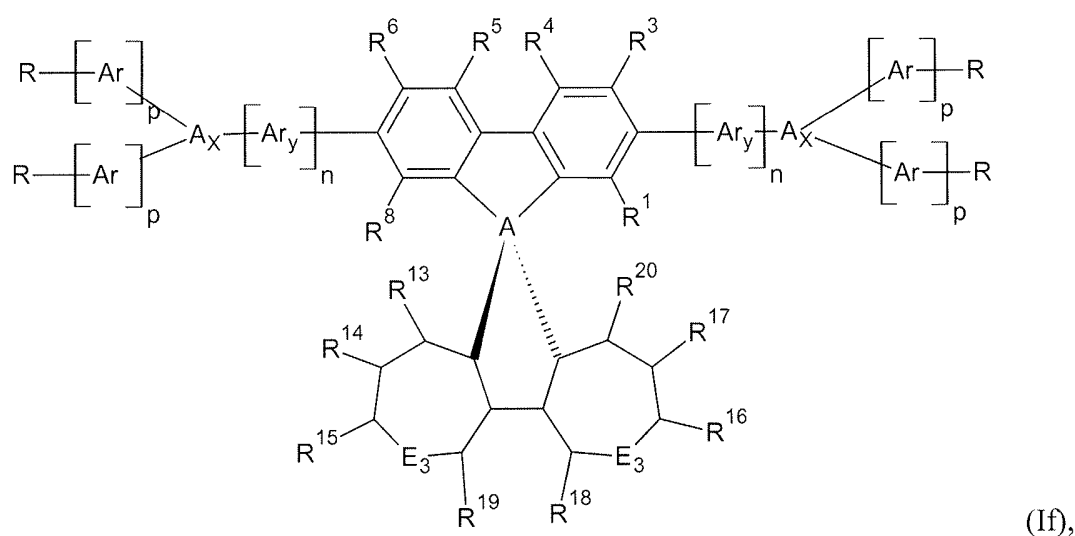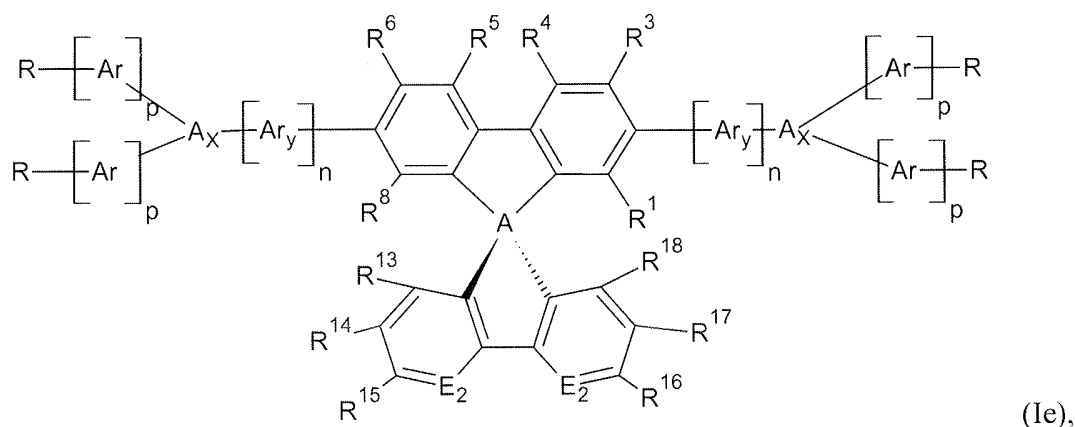

wherein A, Ar_y, A_x, Ar, n, p, R, E₁, E₂, E₃, R¹, R³, R⁴, R⁵, R⁶, R⁸, R⁹, R¹⁰, R¹¹, R¹², R¹³, R¹⁴,
 5 R¹⁵, R¹⁶, R¹⁷, R¹⁸, R¹⁹, R²⁰ and R²¹ are defined as above.

In an embodiment, the compound of the invention according to formula (Ia) is selected from a
 compound of formula (Id), the compound according formula (Ib) is selected from a compound
 of formula (Ie) and the compound according to formula (Ic) is selected from a compound of
 10 formula (If).

In an embodiment, R¹, R³, R⁴, R⁵, R⁶ and R⁸ of the compound of the invention according to
 any one of formulae (I), (Ia), (Ib), (Ic), (Id), (Ie) and (If) are H.

15 R⁹, R¹⁰, R¹¹, R¹², R¹³, R¹⁴, R¹⁵, R¹⁶, R¹⁷, R¹⁸, R¹⁹ and R²⁰ of a compound according to any one
 of formulae (Ia), (Ib), (Ic), (Id), (Ie) and (If) are H. In particular, R⁹, R¹⁰, R¹¹, R¹², R¹³, R¹⁴,

R^{15} , R^{16} , R^{17} , R^{18} , R^{19} and R^{20} of a compound selected from a compound according to any one of formulae (Id), (Ie) and (If) are H.

5 In another embodiment R^9 , R^{12} , R^{13} , R^{14} , R^{15} , R^{16} , R^{17} , R^{18} , R^{19} and R^{20} of a compound according to any one of formulae (Ia), (Ib), (Ic), (Id), (Ie) and (If) are H. Further R^{13} , R^{18} , R^{19} and R^{20} of a compound according to any one of formulae (Ia), (Ib), (Ic), (Id), (Ie) and (If) are H, and R^9 and R^{12} are H if R^{10} and R^{11} are different from H, R^{10} and R^{11} are H if R^9 and R^{12} are different from H, R^{15} and R^{16} are H if R^{14} and R^{17} are different from H, or R^{14} and R^{17} are H if R^{15} and R^{16} are different from H.

10

In an embodiment, R^1 , R^3 , R^4 , R^5 , R^6 , R^8 , R^9 , R^{10} , R^{11} , R^{12} , R^{13} , R^{14} , R^{15} , R^{16} , R^{17} , R^{18} , R^{19} and R^{20} of a compound according to any one of formulae (Ia), (Ib), (Ic), (Id), (Ie) and (If) are H. In particular, R^1 , R^3 , R^4 , R^5 , R^6 , R^8 , R^9 , R^{12} , R^{13} , R^{15} , R^{16} , R^{18} , R^{19} and R^{20} of a compound according to any one of formulae (Ia), (Ib), (Ic), (Id), (Ie) and (Ie) are H or R^1 , R^3 , R^4 , R^5 , R^6 , R^8 , R^9 , R^{12} , R^{13} , R^{14} , R^{17} , R^{18} , R^{19} and R^{20} of a compound according to any one of formulae (Ia), (Ib), (Ic), (Id), (Ie) and (Ie) are H or R^1 , R^3 , R^4 , R^5 , R^6 , R^8 , R^9 , R^{12} , R^{13} , R^{15} , R^{16} , R^{18} , R^{19} and R^{20} of a compound according to any one of formulae (Ia), (Ib), (Ic), (Id), (Ie) and (Ie) are H or R^1 , R^3 , R^4 , R^5 , R^6 , R^8 , R^{10} , R^{11} , R^{13} , R^{14} , R^{17} , R^{18} , R^{19} and R^{20} of a compound according to any one of formulae (Ia), (Ib), (Ic), (Id), (Ie) and (Ie) are H or R^1 , R^3 , R^4 , R^5 , R^6 , R^8 , R^{10} , R^{11} , R^{13} , R^{15} , R^{16} , R^{18} , R^{19} and R^{20} of a compound according to any one of formulae (Ia), (Ib), (Ic), (Id), (Ie) and (Ie) are H.

15

20

Preferably R^9 , R^{12} , R^{13} , R^{15} , R^{16} , R^{18} , R^{19} and R^{20} of the compounds according to any one of formulae (Ia), (Ib), (Ic), (Id), (Ie) and (If) are H; R^{10} , R^{11} , R^{14} and R^{17} are selected from substituent as defined above but different from H. In particular, R^{10} , R^{11} , R^{14} and R^{17} are selected from substituent of formula (1) as defined above. In more particular, R^{10} and R^{11} are selected from substituent as defined above but different from H, and R^{14} and R^{17} are selected from substituent of formula (1) as defined above.

25

According to another preferred embodiment, R^9 , R^{12} , R^{13} , R^{14} , R^{17} , R^{18} , R^{19} and R^{20} of the compounds according to any one of formulae (Ia), (Ib), (Ic), (Id), (Ie) and (If) are H; R^{10} , R^{11} , R^{15} and R^{16} are selected from substituent as defined above but different from H. In particular, R^{10} , R^{11} , R^{15} and R^{16} are selected from substituent of formula (1) as defined above. In more

30

particular, R¹⁰ and R¹¹ are selected from substituent as defined above but different from H, and R¹⁵ and R¹⁶ are selected from substituent of formula (1) as defined above.

5 In a further embodiment, R¹, R³, R⁴, R⁵, R⁶, R⁸ and R⁹, R¹², R¹³, R¹⁵, R¹⁶, R¹⁸, R¹⁹, R²⁰ of a compound according to any one of formulae (Ia), (Ib), (Ic), (Id), (Ie) and (If) are H; R¹⁰, R¹¹, R¹⁴ and R¹⁷ are selected from a substituent of formula (1) as defined above. Or, R¹, R³, R⁴, R⁵, R⁶, R⁸ and R⁹, R¹², R¹³, R¹⁴, R¹⁷, R¹⁸, R¹⁹, R²⁰ of a compound according to any one of formulae (Ia), (Ib), (Ic), (Id), (Ie) and (If) are H; R¹⁰, R¹¹, R¹⁵ and R¹⁶ are selected from a substituent of formula (1) as defined above

10

In a further embodiment R¹, R³, R⁴, R⁵, R⁶, R⁸ and R⁹, R¹², R¹³, R¹⁵, R¹⁶, R¹⁸, R¹⁹, R²⁰ of a compound according to any one of formulae (Ia), (Ib), (Ic), (Id), (Ie) and (If) are H; R², R⁷ and R¹⁰, R¹¹, R¹⁴ and R¹⁷ are selected from a substituent of formula (1) as defined above. Or, R¹, R³, R⁴, R⁵, R⁶, R⁸ and R⁹, R¹², R¹³, R¹⁴, R¹⁷, R¹⁸, R¹⁹, R²⁰ of a compound according to any one of formulae (Ia), (Ib), (Ic), (Id), (Ie) and (If) are H; R², R⁷ and R¹⁰, R¹¹, R¹⁵ and R¹⁶ are selected from a substituent of formula (1) as defined above.

15

The compound of the invention is in particular used as hole transporting material and may function as a hole transporting material and as a hole injection material to bring holes extracted from a sensitizer to the hole collector of the photovoltaic device, e.g. a solid solar cell. This compound is able to passivate the sensitizer or the sensitizer layer and to improve the performance and the efficiency of such a device, and in particular an optoelectronic and/or photoelectrochemical device comprising an organic-inorganic perovskite as sensitizer.

20

25 By "hole transport material", "hole transporting material", "charge transporting material", "organic hole transport material" and "inorganic hole transport material", and the like, is meant any material or composition wherein charges are transported by electron or hole movement (electronic motion) across said material or composition. The "hole transport material" is thus an electrically conductive material. Such hole transport materials, etc., are different from electrolytes. In this latter, charges are transported by diffusion of molecules.

30

In an aspect, the invention provides a hole transporting material comprising at least one compound selected from formulae (I), (Ia), (Ib), (Ic), (Id), (Ie) and (If) as defined above.

The invention also provides an optoelectronic and/or photoelectrochemical device comprising at least one compound selected from a compound according to any one of formulae (I), (Ia), (Ib), (Ic), (Id), (Ie) and (If) as defined above.

- 5 The optoelectronic and/or photoelectrochemical device of the invention further comprises a hole transporting layer comprising said at least one compound of the invention selected from a compound according to any one of formulae (I), (Ia), (Ib), (Ic), (Id), (Ie) and (If) as defined above.
- 10 In another embodiment the optoelectronic and/or photoelectrochemical device of the invention is selected from an organic photovoltaic device, a photovoltaic solid state device, a p-n heterojunction, an organic solar cell, a dye sensitized solar cell, a solid state solar cell, a phototransistor, photodetector, particle detector and OLED (organic light-emitting diode). In particular the optoelectronic and/or photoelectrochemical device of the invention is a solar
- 15 cell, a solid state solar cell or a photovoltaic solid state device.

The optoelectronic and/or photoelectrochemical device of the invention comprises a conducting support layer, n-type semiconductor, a light-harvester layer or a sensitizer layer, a hole transporting layer and a counter electrode and/or metal layer. The optoelectronic and/or

20 photoelectrochemical device may comprise an optional surface-increasing scaffold structure. Said metal layer may be doped as well as the n-type semiconductor. A conductive layer comprising a conductive material may be present between the hole transporting layer and the counter electrode and/or metal layer. The hole transporting layer may be provided on the sensitizer layer and is between the sensitizer layer and the conducting current providing layer,

25 if present, or the counter electrode and/or metal layer. Further layer may be present.

According to a further embodiment, the optoelectronic and/or photoelectrochemical device of the invention may comprise a combination of two or more compounds of the invention as hole transporting material. The hole transporting layer may comprise the combination of two

30 or more compounds of the invention.

The optoelectronic and/or photoelectrochemical device of the invention may comprise a hole collector layer, a conductive layer, an electron blocking layer, a sensitizer layer and a current collector layer, wherein the hole collector layer is coated by the conductive layer; wherein the

electron blocking layer is between the conductive layer and the sensitizer layer, which is in contact with the current collector layer being a metal or a conductor. The hole collector layer comprises a hole transporting material comprising at least one compound of the invention according to any one of formulae (I), (Ia), (Ib), (Ic), (Id), (Ie) and (If).

5

The conductive material is selected from one or more conductive polymers or one or more hole transporting materials, which may be selected from poly(3,4-ethylenedioxythiophene):poly(styrenesulfonate) (PEDOT:PSS), poly(3,4-ethylenedioxythiophene):poly(styrenesulfonate):graphene nanocomposite (PEDOT:PSS:graphene), poly(N-vinylcarbazole) (PVK) and sulfonated poly(diphenylamine) (SPDPA), preferably from PEDOT:PSS, PEDOT:PSS:graphene and PVK, more preferably from PEDOT:PSS. Conductive polymers may also be selected from polymers comprising polyaniline, polypyrrole, polythiophene, polybenzene, polyethylenedioxythiophene, polypropylenedioxy-thiophene, polyacetylene, and combinations of two or more of the
15 aforementioned, for example.

The conducting support layer is preferably substantially transparent. "Transparent" means transparent to at least a part, preferably a major part of the visible light. Preferably, the conducting support layer is substantially transparent to all wavelengths or types of visible
20 light. Furthermore, the conducting support layer may be transparent to non-visible light, such as UV and IR radiation, for example.

According to an embodiment, the conducting support layer provides the support layer of photovoltaic solid state device. Preferably, the optoelectronic and/or electrochemical device is
25 built on said support layer. The support of the device may be also provided on the side of the counter electrode. In this case, the conductive support layer does not necessarily provide the support of the device, but may simply be or comprise a current collector, for example a metal foil.

30 The conducting support layer preferably functions and/or comprises a current collector, collecting the current obtained from the device. The conducting support layer may comprise a material selected from indium doped tin oxide (ITO), fluorine doped tin oxide (FTO), ZnO-Ga₂O₃, ZnO-Al₂O₃, tin-oxide, antimony doped tin oxide (ATO), SrGeO₃ and zinc oxide, preferably coated on a transparent substrate, such as plastic or glass. In this case, the plastic or

glass provides the support structure of the layer and the cited conducting material provides the conductivity. Such support layers are generally known as conductive glass and conductive plastic, respectively, which are thus preferred conducting support layers in accordance with the invention. The conducting support layer comprises a conducting transparent layer, which
5 may be selected from conducting glass and from conducting plastic.

The surface-increasing scaffold structure is provided on said conducting support structure or on a protective layer that may be provided on said scaffold structure. The surface-increasing scaffold structure is nanostructured and/or mesoporous.

10

The scaffold structure is made from and/or comprises a metal oxide. For example, the material of the scaffold structure is selected from semiconducting materials, such as Si, TiO₂, SnO₂, ZrO₂, Al₂O₃, Fe₂O₃, ZnO, WO₃, Nb₂O₅, CdS, ZnS, PbS, Bi₂S₃, CdSe, CdTe, SrTiO₃, GaP, InP, GaAs, CuInS₂, CuInSe₂, and combinations thereof, for example. Preferred
15 semiconductor materials are Si, TiO₂, SnO₂, ZnO, WO₃, Nb₂O₅ and SrTiO₃, for example. According to an embodiment, the surface-increasing scaffold structure is nanostructured and/or nanoporous.

The invention does not intend to exclude the possibility that there are one or more
20 intermediate layers between the scaffold structure and the conductive support. Such intermediate layers, if present, would preferably be conducting and/or semiconducting.

According to an embodiment, the sensitizer layer of the optoelectronic and/or photoelectrochemical device comprising at least one pigment being selecting from organic,
25 inorganic, organometallic and organic-inorganic pigments or a combination thereof. The sensitizer is preferably a light absorbing compound or material. Preferably, the sensitizer is a pigment, and most preferably the sensitizer is an organic-inorganic pigment.

The sensitizer layer or light-harvester layer may comprise one or more pigments of the group
30 consisting of organometallic sensitizing compounds (phthalocyanine derived compounds, porphyrine derived compounds), metal free organic sensitizing compounds (diketopyrrolopyrrole (DPP) based sensitizer), inorganic sensitizing compounds such as quantum dots, Sb₂S₃ (Antimonysulfide, for example in the form of thin films), aggregates of

organic pigments, nanocomposites, in particular organic-inorganic perovskites, and combinations of the aforementioned.

In an embodiment, the optoelectronic and/or photoelectrochemical device is selected from a photovoltaic solid state device or a solar cell comprising an inorganic perovskite or an organic-inorganic perovskite as sensitizer. In a preferred embodiment, the sensitizer is an organic-inorganic perovskite.

Further the optoelectronic and/or photoelectrochemical device is selected from a photovoltaic solid state device or a solar cell comprising an organic-inorganic perovskite as sensitizer under the form of a layer.

The light-harvester layer or the sensitizer layer comprises, consists of or is made of an organic-inorganic perovskite. Said organic-inorganic perovskite is provided under a film of one perovskite pigment or mixed perovskite pigments or perovskite pigments mixed with further dyes or sensitizers.

The sensitizer layer may comprise a further pigment in addition to the organic-inorganic perovskite pigment, said further pigment selected from organic pigment, organometallic pigment or inorganic pigment.

The term "perovskite", for the purpose of this specification, refers to the "perovskite structure" and not specifically to the perovskite material, CaTiO_3 . For the purpose of this specification, "perovskite" encompasses and preferably relates to any material that has the same type of crystal structure as calcium titanium oxide and of materials in which the bivalent cation is replaced by two separate monovalent cations. The perovskite structure has the general stoichiometry WMX_3 , where "W" and "M" are cations and "X" is an anion. The "W" and "M" cations can have a variety of charges and in the original Perovskite mineral (CaTiO_3), the W cation is divalent and the M cation is tetravalent. For the purpose of this invention, the perovskite formulae includes structures having three (3) or four (4) anions, which may be the same or different, and/or one or two (2) organic cations, and/or metal atoms carrying two or three positive charges, in accordance with the formulae presented elsewhere in this specification.

The optoelectronic and/or photoelectrochemical device of the invention may comprise one or more layers of an organic-inorganic perovskite. In said device, the last upper layer of organic-inorganic perovskite is coated by the hole transporting layer comprising a hole transporting material as defined above, preferably comprising at least one compound according to any one of formulae (I), (Ia), (Ib), (Ic), (Id), (Ie) and (If).

In an embodiment, the optoelectronic and/or photoelectrochemical device of the invention, wherein the organic-inorganic perovskite layer material comprises a perovskite-structure according any one of formulae (II), (IIa), (IIb), (IIc), (IId) and (IIe) below:

- | | | |
|----|-----------------|--------|
| 10 | $WW'MX_4$ | (II) |
| | WMX_3 | (IIa) |
| | $WW'N_{2/3}X_4$ | (IIb) |
| | $WN_{2/3}X_3$ | (IIc) |
| | $BN_{2/3}X_4$ | (IId) |
| 15 | BMX_4 | (IIe), |

wherein

W and W' are organic, monovalent cations that are independently selected from primary, secondary, tertiary or quaternary organic ammonium compounds, including N-containing heterorings and ring systems, W and W' having independently from 1 to 60 carbons and 1 to 20 heteroatoms;


B is an organic, bivalent cation selected from primary, secondary, tertiary or quaternary organic ammonium compounds having from 1 to 60 carbons and 2-20 heteroatoms and having two positively charged nitrogen atoms;

M is a divalent metal cation selected from the group consisting of Cu^{2+} , Ni^{2+} , Co^{2+} , Fe^{2+} , Mn^{2+} , Cr^{2+} , Pd^{2+} , Cd^{2+} , Ge^{2+} , Sn^{2+} , Pb^{2+} , Eu^{2+} , or Yb^{2+} ;

N is selected from the group of Bi^{3+} and Sb^{3+} ; and,

X is independently selected from Cl^- , Br^- , I^- , NCS^- , CN^- , BF_4^- , PF_6^- , CNO^- , $SeCN^-$, and NCO^- .

In particular, the three or four X may be identical or different. For example, in WMX_3 (formula IIa) may be expressed as formula (IIa') below:





wherein Xi, Xii, Xiii are independently selected from Cl^- , Br^- , I^- , NCS^- , CN^- , BF_4^- , PF_6^- , CNO^- , SeCN^- , and NCO^- , preferably from halides (Cl^- , Br^- , I^-), and W and M are as defined elsewhere in this specification. Xi, Xii, Xiii may thus be the same or different in this case.

- 5 Preferably, if Xi, Xii, Xiii in formulae (IIa) and (IIc) or Xi, Xii, Xiii, Xiv in formulae (II), (IIb), (IId) or (IIe) comprise different anions X, there are not more than two different anions. For example, Xi and Xii being the same with Xiii being an anion that is different from Xi and Xii.
- 10 According to a preferred embodiment, said organic-inorganic perovskite layer comprises a perovskite-structure according to any one of the formulae (IIf) to (III):
- WPbX₃ (IIf)
- WSnX₃ (IIg)
- WBiX₄ (IIh)
- 15 WW'PbX₄ (IIi)
- WW'SnX₄ (IIj)
- BPbX₄ (IIk)
- B₂SnX₄ (III)
- wherein W, W', B and X are as defined above in this specification. Preferably, X is preferably
- 20 selected from Cl^- , Br^- and I^- , most preferably X is I^- or a mixture of Br^- and I^- .

According to a preferred embodiment, said organic-inorganic perovskite layer comprises a perovskite-structure of the formulae (IIf) to (III), more preferably (IIf) and/or (IIg) above.

- 25 According to an embodiment, W and W' are monovalent cations selected independently from any one of the compounds of formulae (20) to (28) below:

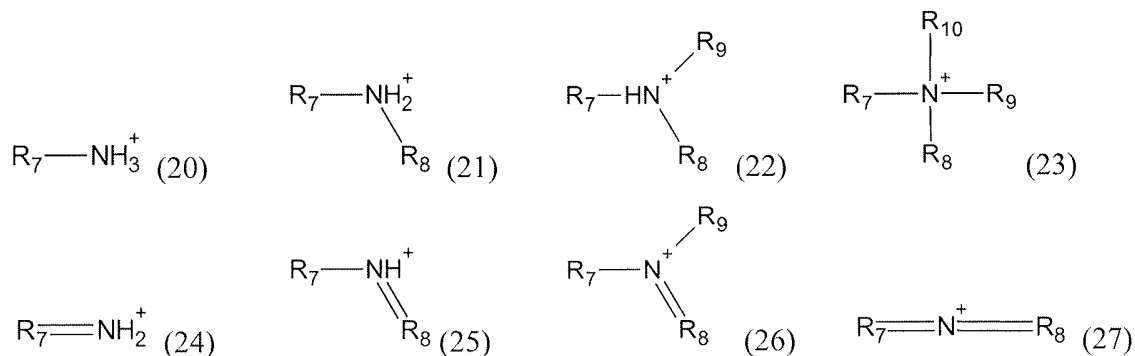



wherein,

R₇, R₈, R₉ and R₁₀ is independently selected from C1-C15 organic substituents comprising from 0 to 15 heteroatoms.

5

According to an embodiment of said C1-C15 organic substituent any one, several or all hydrogens in said substituent may be replaced by halogen and said organic substituent may comprise up to fifteen (15) N, S or O heteroatoms, and wherein, in any one of the compounds (20) to (28), the two or more of substituents present (R₇, R₈, R₉ and R₁₀, as applicable) may be covalently connected to each other to form a substituted or unsubstituted ring or ring system. Preferably, in a chain of atoms of said C1-C15 organic substituent, any heteroatom is connected to at least one carbon atom. Preferably, neighboring heteroatoms are absent and/or heteroatom-heteroatom bonds are absent in said C1-C15 organic substituent comprising from 0 to 15 heteroatoms. The heteroatoms may be selected from N, S, and/or O.


15

According to an embodiment, R₇, R₈, R₉ and R₁₀ are independently selected from C1 to C15 aliphatic and C4 to C15 aromatic or heteroaromatic substituents, wherein any one, several or all hydrogens in said substituent may be replaced by halogen and wherein, in any one of the compounds (20) to (28), the two or more of the substituents present may be covalently connected to each other to form a substituted or unsubstituted ring or ring system.

20

According to a preferred embodiment, the organic-inorganic perovskite in the device of the invention is selected from a compound of formula (II) or (IIa).

25 According to an embodiment, B is a bivalent cation selected from any one of the compounds of formulae (49) and (50) below:



wherein,

in the compound of formula (29), G is an organic linker structure having 1 to 10 carbons and 0 to 5 heteroatoms selected from N, S, and/or O, wherein one or more hydrogen atoms in said G may be replaced by halogen;

wherein R₁₁ and R₁₂ are independently selected from a compounds of any one of formulae
5 (20) to (28); and wherein, in the compound of formula (30), the circle containing said two positively charged nitrogen atoms represents a substituted or unsubstituted aromatic ring or ring system comprising 4 to 15 carbon atoms and 2 to 7 heteroatoms or 4 to 10 carbon atoms and 2 to 5 heteroatoms, wherein said nitrogen atoms are ring heteroatoms of said ring or ring system, and wherein the remaining of said heteroatoms may be selected independently from
10 N, O and S and wherein R₁₃ and R₁₄ are independently selected from H and from a compounds of any one of formulae (20) to (28). Halogen atom substituting hydrogen atom totally or partially may also be present in addition to and/or independently of said 2 to 7 heteroatoms.

15 Preferably, if the number of carbons in G is impair, the number of heteroatoms is smaller than the number of carbons. Preferably, in the ring structure of formula (30), the number of ring heteroatoms is smaller than the number of carbon atoms. According to an embodiment, G is an aliphatic, aromatic or heteroaromatic linker structure having from 1 to 10 carbons.

20 According to an embodiment, R₇, R₈, R₉ and R₁₀ are independently selected from C1 to C10 alkyl, C2 to C10 alkenyl, C2 to C10 alkynyl, C4 to C10 heteroaryl and C6 to C10 aryl, wherein said alkyl, alkenyl, and alkynyl, if they comprise 3 or more carbons, may be linear, branched or cyclic, wherein said heteroaryl and aryl may be substituted or unsubstituted, and wherein several or all hydrogens in R₇, R₈, R₉ and R₁₀ may be replaced by halogen.

25 According to an embodiment, R₇, R₈, R₉ and R₁₀ are independently selected from C1 to C8 alkyl, C2 to C8 alkenyl, C2 to C8 alkynyl, C4 to C8 heteroaryl and C6 to C8 aryl, wherein said alkyl, alkenyl, and alkynyl, if they comprise 3 or more carbons, may be linear, branched or cyclic, wherein said heteroaryl and aryl may be substituted or unsubstituted, and wherein
30 several or all hydrogens in R₇, R₈, R₉ and R₁₀ may be replaced by halogen.

According to an embodiment, R₇, R₈, R₉ and R₁₀ are independently selected from C1 to C6 alkyl, C2 to C6 alkenyl, C2 to C6 alkynyl, C4 to C6 heteroaryl and C6 aryl, wherein said alkyl, alkenyl, and alkynyl, if they comprise 3 or more carbons, may be linear, branched or

cyclic, wherein said heteroaryl and aryl may be substituted or unsubstituted, and wherein several or all hydrogens in R₇, R₈, R₉ and R₁₀ may be replaced by halogen.

5 According to an embodiment, R₇, R₈, R₉ and R₁₀ are independently selected from C1 to C4 alkyl, C2 to C4 alkenyl and C2 to C4 alkynyl, wherein said alkyl, alkenyl and alkynyl, if they comprise 3 or more carbons, may be linear, branched or cyclic, and wherein several or all hydrogens in R₇, R₈, R₉ and R₁₀ may be replaced by halogen.

10 According to an embodiment, R₇, R₈, R₉ and R₁₀ are independently selected from C1 to C3, preferably C1 to C2 alkyl, C2 to C3, preferably C2 alkenyl and C2 to C3, preferably C2 alkynyl, wherein said alkyl, alkenyl and alkynyl, if they comprise 3 or more carbons, may be linear, branched or cyclic, and wherein several or all hydrogens in R₇, R₈, R₉ and R₁₀ may be replaced by halogen.

15 According to an embodiment, R₇, R₈, R₉ and R₁₀ is independently selected from C1 to C4, more preferably C1 to C3 and even more preferably C1 to C2 alkyl. Most preferably R₇, R₈, R₉ and R₁₀ are methyl. Again, said alkyl may be completely or partially halogenated.


20 According to an embodiment, W, W' and B are monovalent (W, W') and bivalent (B) cations, respectively, selected from substituted and unsubstituted C5 to C6 rings comprising one, two or more nitrogen heteroatoms, wherein one (for W and W') or two (for B) of said nitrogen atoms is/are positively charged. Substituents of such rings may be selected from halogen and from C1 to C4 alkyls, C2 to C4 alkenyls and C2 to C4 alkynyls as defined above, preferably from C1 to C3 alkyls, C3 alkenyls and C3 alkynyls as defined above. Said ring may comprise 25 further heteroatoms, which may be selected from O, N and S. Bivalent organic cations B comprising two positively charged ring N-atoms are exemplified, for example, by the compound of formula (30) above. Such rings may be aromatic or aliphatic.

30 W, W' and B may also comprise a ring system comprising two or more rings, at least one of which being from substituted and unsubstituted C5 to C6 ring as defined as above. The elliptically drawn circle in the compound of formulae (30) may also represent a ring system comprising, for example, two or more rings, but preferably two rings. Also if W and/or W' comprises two rings, further ring heteroatoms may be present, which are preferably not charged, for example.

According to an embodiment, however, the organic cations W, W' and B comprise one (for W, W'), two (for B) or more nitrogen atom(s) but are free of any O or S or any other heteroatom, with the exception of halogens, which may substitute one or more hydrogen atoms in cation W and/or B.

W and W' preferably comprise one positively charged nitrogen atom. B preferably comprises two positively charged nitrogen atoms.

W, W' and B may be selected from the exemplary rings or ring systems of formulae (31) and (32) (for W, W') and from (33) to (35) (for B) below:

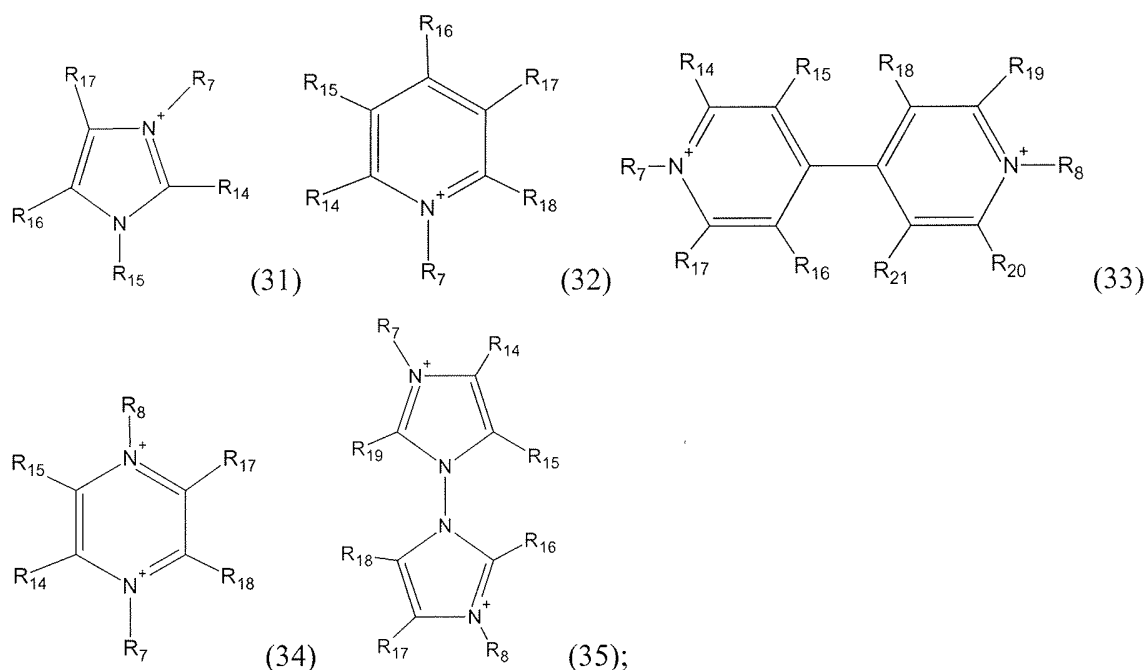

15 wherein

R₇ and R₈ are selected from substituents as defined above, and R₁₄, R₁₅, R₁₆, R₁₇, R₁₈, R₁₉, R₂₀ and R₂₁ are independently selected from H, halogen and substituents as defined above for R₇, R₈, R₉ and R₁₀. Preferably, R₁₄, R₁₅, R₁₆, R₁₇, R₁₈, R₁₉, R₂₀ and R₂₁ are selected from H and halogen, most preferably H.

20

In the organic cations W, W' and B, hydrogen atoms may be substituted by halogens, such as F, Cl, I, and Br, preferably F or Cl. Such a substitution is expected to reduce the hygroscopic

properties of the perovskite layer or layers and may thus provide a useful option for the purpose of the present specification.

5 According to a preferred embodiment, W and W' are independently selected from organic cations of formula (20) and/or formula (28).

According to a preferred embodiment, the metal M is selected from Sn^{2+} and Pb^{2+} , preferably Pb^{2+} . According to a preferred embodiment, N is Sb^{3+} .

10 According to a preferred embodiment, the three or four X are independently selected from Cl^- , Br^- , and I^- .

In a further aspect, the invention provides use of the compound of the invention as a tuner of HOMO level.

15

The present invention will now be illustrated by way of examples. These examples do not limit the scope of this invention, which is defined by the appended claims.

Examples

20

Example 1: Synthesis of functionalized spirofluorene derivatives according to the invention

25 Spiro compounds HT-SO2, HT-SO7, HT-SO8, HT-SO9, HT-SO10 (Figure 1E) comprise a diarylamino functionalized fluorene moiety and a cyclopenta[2,1-*b*:3,4-*b'*]dithiophene unit sharing a common sp^3 -hybridized carbon atom.

30 Only a few examples of related mixed spiro compounds, devoid of electron-donating diarylamino substituents on the fluorene portion of the molecule, have been disclosed so far and their synthesis proved to be cumbersome. Indeed, considerable amounts of by-products are formed when the intramolecular ring closure leading to the formation of the spiro linkage is carried out on 2,2'-bithiophene derivatives under standard acidic conditions. Low yields after extensive purification of complex reaction mixtures have been thus reported. It has been recently shown that the introduction of protecting groups on the electron-rich α -positions of the thiophene units, in combination with the use of suitable Lewis acids, markedly increases the efficiency of the intramolecular cyclization process. Based on these considerations, we

have developed two viable synthetic routes towards diarylamino functionalized fluorene-bithiophene spiro compounds, which differ in the stage of introduction of the diarylamino groups and are outlined in Figure 1A.

5 Both strategies were explored in the case of HT-SO2 and the synthetic details are here summarized. Following strategy A (Figure 1A and Figure 1B), palladium catalysed coupling reaction between 2,7-dibromofluoren-9-one **1** and bis(4-methoxyphenyl)amine **2** allowed to introduce two diarylamino substituents onto the fluorene moiety at the first stage (Scheme 2). 2,7-Bis(bis(4-methoxyphenyl)amino)fluoren-9-one **3** was thus isolated in excellent yield. 10 Subsequent reaction of **3** with the carbanion generated by treatment of 3-bromo-5,5'-bis(trimethylsilyl)-2,2'-bithiophene **4** with BuLi at low temperature afforded the tertiary alcohol **5** in 75% yield.

Intramolecular Friedel-Craft cyclization of **5** was performed in refluxing chloroform in the presence of FeCl₃ as Lewis acid according to a procedure previously devised for the synthesis 15 of 4,4'-spirobi(cyclopenta(2,1-b:3,4-b'))dithiophene derivatives [2]. Complete removal of the TMS protecting groups was ensured by post-reaction treatment of the chloroform solution with trifluoroacetic acid and the desired product HT-SO2 could be readily isolated by column chromatography on silica in 66% yield (overall yield from **1** = 46.5%).

20

Following strategy B (Figure 1A and Figure 1C), bithiophene derivative **4** was treated with BuLi at low temperature and then reacted with 2,7-dibromofluoren-9-one **1** to give carbinol **6** in 80% yield (Scheme 3). Intramolecular cyclization mediated by FeCl₃ was effective also for this derivative, affording the key intermediate **7** in 80% yield. Finally, the targeted compound 25 HT-SO2 was obtained by palladium catalysed reaction of **7** with bis(4-methoxyphenyl)amine **2** in 81 % yield (overall yield from **1** = 51%).

Strategies A and B here described are both suitable for the preparation of the targeted compounds. The second one seems to be preferable because the presence of two bromine 30 atoms on the preformed spiro compound **7** opens the way to a variety of promising structural modifications through well-established synthetic procedures. To explore this option, **7** was used as the common intermediate in the preparation of mixed fluorene/bithiophene spiro derivatives by palladium catalysed amination reaction with different diarylamines (Figure 1D). Compounds HT-SO7, HT-SO8, HT-SO9 and HT-SO10 (Figure 1E) were thus obtained

in good to excellent yields, ranging from 64 to 90%.

All available chemicals were purchased from commercial sources and were used without any further purification. Solvents were purified by standard methods and dried if necessary. 3-Bromo-5,5'-bis(trimethylsilyl)-2,2'-bithiophene **4** were prepared as previously described. 2,7-Bis(bis(4-methoxyphenyl)amino)-fluoren-9-one **3** was prepared according to a modification of the original literature procedure [4]. Para-substituted diarylamines were synthesized according to a two-step procedure [5] involving the Ulmann-like coupling of two equivalents of para-substituted aryl iodide with BocNH₂, followed by deprotection of the Ar₂N-Boc intermediate under acidic conditions. Reactions were monitored by thin layer chromatography (TLC) that was conducted on plates precoated with silica gel Si 60-F254 (Merck, Germany). Column chromatography was conducted using silica gel Si 60, 0.063–0.200 mm (normal) or 0.040–0.063 mm (flash) (Merck, Darmstadt, Germany). ¹H and ¹³C NMR spectra were recorded on a Bruker Avance 400 (400 and 100.6 MHz, respectively); chemical shifts are indicated in parts per million downfield from SiMe₄, using the residual proton (CHCl₃ = 7.26 ppm) and carbon (CDCl₃ = 77.0 ppm) solvent resonances as the internal reference. Protons and carbon assignments were achieved by ¹³C-APT, ¹H-¹H COSY, and ¹H-¹³C heteronuclear correlation experiments. Coupling constant values J are given in Hz.

20 *Synthesis of HT-SO2 (Figure 1A)*

2,7-Bis(bis(4-methoxyphenyl)amino)fluoren-9-one 3. In a flame dried Schlenk tube 2,7-dibromofluoren-9-one **1** (1 g, 2.96 mmol), bis(4-methoxyphenyl)amine **2** (1.47 g, 6.41 mmol) and Pd₂(dba)₃ (100 mg, 0.11 mmol) were introduced under inert atmosphere. The Schlenk tube was evacuated and backfilled with nitrogen three times. After the addition of toluene (16 mL) and ^tBu₃P (1M toluene solution, 110 μL, 0.11 mmol), NaO^tBu (600 mg, 6.24 mmol) was added and the reactor was brought into an oil bath pre-heated at 110°C. The reaction mixture was stirred at this temperature overnight. After cooling to rt, the solvent was removed at reduced pressure, the residue was taken up in CH₂Cl₂ and washed with water and brine. The organic phase was dried over MgSO₄, filtered and the solvent removed at reduced pressure. The crude material was suspended in MeOH and refluxed for 1 h. After cooling, the mixture was filtered on Buchner funnel. The solid was washed with methanol and dried under reduced pressure to give the title compound (1.76 g, 94% yield) as a blue solid whose spectral data are in agreement with those reported in the literature.

¹H NMR (400 MHz, DMSO-*d*₆): δ 7.32 (d, *J* = 8.0 Hz, 2H, Fluor-H), 7.04 (d, *J* = 8.8 Hz, 8H,

Ar-H), 6.92 (d, $J = 8.8$ Hz, 8H, Ar-H), 6.81 (dd, $J = 8.0$ Hz, $J = 2.4$ Hz, 2H, Fluor-H), 6.76 (d, $J = 2.4$ Hz, 2H, Fluor-H), 3.73 (OCH₃); ¹³C NMR (100.6 MHz, DMSO-*d*₆): δ 193.7 (CO), 156.6, 149.1, 139.9, 136.0, 135.0, 127.6 (Ar-C), 124.5 (Fluor-C), 121.4 (Fluor-C), 115.6 (Ar-C), 114.3 (Fluor-C), 55.7 (OCH₃).

5

2,7-Bis(bis(4-methoxyphenyl)amino)-9-(5,5'-bis(trimethylsilyl)-2,2'-bithiophen-3-yl)fluoren-9-ol **5**. To a solution of 3-bromo-5,5'-bis(trimethylsilyl)-2,2'-bithiophene **4** (419.7 mg, 1.08 mmol) in dry Et₂O (16 mL) cooled to -78°C, BuLi (1.6 M in hexane, 670 μ L, 1.07 mmol) was added dropwise under stirring. After 1h a solution of ketone **3** (555.8 mg, 0.87 mmol) in dry THF (10 mL) was added dropwise. At the end of the addition, the cooling bath was removed and mixture was allowed to return to rt and left under stirring overnight. After the addition of a solution of saturated NH₄Cl and phase separation, the organic layer was washed with water, brine and dried over MgSO₄. After filtration, the solvent was removed at reduced pressure and the crude material was purified by column chromatography (silica gel, petroleum ether:Et₂O 6:4) affording the title compound (620 mg, 75% yield) as brown foam.

10

¹H NMR (400 MHz, CDCl₃ + 1% v/v NH₂NH₂·H₂O): δ 7.47 (br s, 1H, Thioph-H), 7.09 (d, $J = 8.0$ Hz, 2H, Fluor-H), 6.96 (d, $J = 8.4$ Hz, 8H, Ar-H), 6.90 (d, $J = 2.0$ Hz, 2H, Fluor-H), 6.80-6.75 (m, 11H, Ar-H, Fluor-H, Thioph-H), 6.29 (d, $J = 2.8$ Hz, 2H, Thioph-H), 0.27 (s, 9H, SiCH₃), 0.26 (s, 9H, SiCH₃); ¹³C NMR (100.6 MHz, CDCl₃ + 1% v/v NH₂NH₂·H₂O): δ 155.5, 150.4, 148.0, 142.0, 141.6, 141.2, 139.2, 139.1, 135.2, 135.1 (Thioph-C), 133.0 (Thioph-C), 129.5 (Thioph-C), 126.0 (Ar-C), 122.3 (Fluor-C), 119.5 (Fluor-C), 118.0 (Fluor-C), 114.6 (Ar-C), 82.1, 55.5 (OCH₃), 0.1 (Si-CH₃), 0.0 (Si-CH₃).

20

2',7'-Bis(bis(4-methoxyphenyl)amino)spiro[cyclopenta[2,1-b:3,4-b']dithiophene-4,9'-

25

fluorene] **HT-SO2**. To boiling CHCl₃ (amylene stabilised, 20 mL) containing FeCl₃ (2.5 mg, 0.015 mmol), carbinol **5** (54.8 mg, 0.058 mmol) was added and the dark red solution was refluxed under stirring until the disappearance of the starting material was confirmed by TLC analysis (silica gel, Petroleum ether: Et₂O 6:4). After cooling, TFA (0.2 mL) was added and the mixture was stirred at rt for 20 min and then concentrated at reduced pressure. The residue was taken up in CH₂Cl₂, washed with saturated aqueous NaHCO₃ solution, water and brine and dried over MgSO₄. After filtration, the solvent was removed at reduced pressure and the crude was purified by column chromatography (silica gel, petroleum ether:Et₂O 8:2) affording the title compound (30 mg, 66%) as an off-white solid.

30

¹H NMR (400 MHz, CDCl₃ + 1% v/v NH₂NH₂·H₂O): δ 7.44 (d, $J = 8.4$ Hz, 2H, Fluor-H),

7.05 (d, J = 5.2 Hz, 2H, Thioph-H), 6.88 (d, J = 9.2 Hz, 8H, Ar-H), 6.82 (dd, J = 8.4 Hz, J = 2.0 Hz, 2H, Fluor-H), 6.69 (d, J = 9.2 Hz, 8H, Ar-H), 6.51 (d, J = 5.2 Hz, 2H, Thioph-H), 6.47 (d, J = 2.0 Hz, 2H, Fluor-H), 3.74 (s, 12H, OCH₃); ¹³C NMR (100.6 MHz, CDCl₃ + 1% v/v NH₂NH₂·H₂O): δ 155.3, 154.9, 147.3, 146.1, 141.2, 138.2, 135.0, 125.6 (Ar-C), 125.2 (Thioph-C), 121.7 (Fluor-C), 121.3 (Thioph-C), 119.6 (Fluor-C), 116.9 (Fluor-C), 114.4 (Ar-C), 61.7, 55.5 (OCH₃).

Synthesis of HT-SO2 (Figure 1C)

9-(5,5'-Bis(trimethylsilyl)-2,2'-bithiophen-3-yl)-2,7-dibromo-fluoren-9-ol **6**. To a solution of protected dithiophene **4** (1.54 g, 3.95 mmol) in dry Et₂O (50 mL) cooled to -78°C, BuLi (1.6 M in hexane, 2.5 mL, 4 mmol) was added dropwise under stirring. After 2h, a solution of ketone **3** (1.11 g, 3.28 mmol) in dry THF (30 mL) was added dropwise. At the end of the addition, the cooling bath was removed and mixture was allowed to return to rt and left under stirring for 4h. After the addition of saturated aqueous NH₄Cl solution and phase separation, the organic layer was washed with water, brine and dried over MgSO₄. After filtration, the solvent was removed at reduced pressure and the crude material was purified by flash column chromatography (silica gel, petroleum ether:CH₂Cl₂ 7:3) affording the title compound (1.7 g, 80% yield) as an off-white foam.

¹H NMR (400 MHz, CDCl₃): δ 7.73 (s, 1H, Thioph-H), 7.42 (d, J = 1.6 Hz, 2H, Fluor-H), 7.36 (dd, J = 8.0 Hz, J = 1.6 Hz, 2H, Fluor-H), 7.21 (d, J = 8.0 Hz, 2H, Fluor-H), 6.62 (d, J = 3.6 Hz, 1H, Thioph-H), 6.03 (d, J = 3.6 Hz, 1H, Thioph-H), 0.32 (s, 9H, SiCH₃), 0.29 (s, 9H, SiCH₃); ¹³C NMR (100.6 MHz, CDCl₃): δ 151.0, 142.7, 140.7, 140.6, 138.4, 137.8, 136.0, 134.4 (Thioph-C), 133.1 (Thioph-C), 132.3 (Fluor-C), 129.8 (Thioph-C), 128.5 (Fluor-C), 122.3, 121.3 (Fluor-C), 82.0, 0.1 (Si-CH₃), 0.0 (Si-CH₃);

25

2',7'-Dibromospiro[cyclopenta[2,1-b:3,4-b']dithiophene-4,9'-fluorene] 7 Lewis acid mediated cyclization: to boiling CHCl₃ (amylene stabilised, 250 mL) carbinol **6** (560 mg, 0.86 mmol) and FeCl₃ (75 mg, 0.46 mmol) was added. The solution became green and after 20 min under stirring the disappearance of starting material was confirmed by TLC analysis (silica gel, Petroleum ether: CH₂Cl₂ 7:3). The mixture was cooled to rt and the solvent removed at reduced pressure. The crude material was purified by column chromatography (silica gel, petroleum ether:CHCl₃ 9:1) to give the title compound (339 mg, 81% yield) as a white solid.

Brønsted acid mediated cyclization: to boiling AcOH (200 mL) carbinol **6** (500 mg, 0.77 mmol) and concentrated HCl (0.3 mL) were added and the solution was refluxed under

stirring for 2 h. After cooling to rt, the solvent was removed at reduced pressure and the residue taken up in AcOEt and washed with aqueous NaOH solution (10%, w/v) and water. The organic phase was dried over MgSO₄, filtered and the solvent removed under reduced pressure. The crude material was purified by column chromatography (silica gel, petroleum ether:CHCl₃ 9:1) to give the title compound (295 mg, 79% yield) as a white solid.

NMR spectral data for the two samples were identical.

¹H NMR (400 MHz, CDCl₃): δ 7.63 (d, J = 8.4 Hz, 2H, Fluor-H), 7.49 (d, J = 8.4 Hz, J = 1.6 Hz, 2H, Fluor-H), 7.12 (d, J = 5.0 Hz, 2H, Thioph-H), 6.95 (d, J = 1.6 Hz, 2H, Fluor-H), 6.41 (d, J = 5.0 Hz, 2H, Thioph-H); ¹³C NMR (100.6 MHz, CDCl₃): δ 152.9, 147.1, 139.5, 138.9, 131.3 (Fluor-C), 126.9 (Thioph-C), 126.1 (Fluor-C), 121.8, 121.5 (Fluor-C), 121.3 (Thioph-C), 61.3.

2',7'-Bis(bis(4-methoxyphenyl)amino)spiro[cyclopenta[2,1-b:3,4-b']dithiophene-4,9'-fluorene] **HT-SO2**. In a flame dried Schlenk tube the spiro derivative **7** (303.7 mg, 0.62

mmol), bis(4-methoxyphenyl)amine **2** (315.8 mg, 1.38 mmol) and Pd₂(dba)₃ (22.2 mg, 0.024 mmol) were introduced under inert atmosphere. The Schlenk tube was evacuated and backfilled with nitrogen three times. After the addition of toluene (5 mL) and ¹Bu₃P (1M toluene solution, 25 μL, 0.025 mmol), NaO^tBu (149 mg, 1.55 mmol) was added and the reactor was brought into an oil bath pre-heated at 110°C. The reaction mixture was stirred at this temperature overnight. After cooling to rt, the mixture was diluted with Et₂O and washed with water and brine. The organic phase was dried over MgSO₄, filtered and the solvent removed at reduced pressure. The crude material was purified by flash column chromatography (silica gel, hexane:AcOEt 8:2) to give the title compound (400 mg, 82% yield) as an off-white solid.

General procedure for the amination of 7. A flame dried Schlenk tube was charged with **7** (1 mmol), diarylamine (2.2 mmol) and Pd₂(dba)₃ (4 mol%). The Schlenk tube was evacuated and backfilled with nitrogen three times. After the addition of toluene (6 mL) and ¹Bu₃P (1M toluene solution, 4mol%), NaO^tBu (2.5 mmol) was added and the reactor was brought into an oil bath pre-heated at 110°C. The reaction mixture was stirred at this temperature overnight. After cooling to rt, the mixture was diluted with CH₂Cl₂ and washed with water and brine. The organic phase was dried over MgSO₄, filtered and the solvent removed at reduced pressure. The crude material was purified by column chromatography on silica gel.

2',7'-Bis(diphenylamino)spiro[cyclopenta[2,1-b:3,4-b']dithiophene-4,9'-fluorene] **HT-SO7**.

This product was obtained according to the general amination procedure starting from **7** (405 mg, 0.83 mmol) and diphenylamine (306 mg, 1.8 mmol). Flash column chromatography (silica gel, hexane:toluene from 9:1 to 8:2) gave the title compound as an off-white solid (500 mg, 91% yield).

¹H NMR (400 MHz, CDCl₃ + 1% v/v NH₂NH₂·H₂O): δ 7.56 (d, J = 8.4 Hz, 2H, Fluor-H), 7.17-7.13 (m, 8H, Ar-H), 7.06 (d, J = 5.2 Hz, 2H, Thioph-H), 6.99-6.91 (m, 14H, Ar-H, Fluor-H), 6.61 (d, J = 2.0 Hz, 2H, Fluor-H), 6.53 (d, J = 5.2 Hz, 2H, Thioph-H); ¹³C NMR (100.6 MHz, CDCl₃ + 1% v/v NH₂NH₂·H₂O): δ 154.5, 147.6, 146.7, 146.5, 138.4, 136.4, 129.1 (Ar-C), 125.5 (Thioph-C), 124.3 (Ar-C), 123.7 (Ar-C), 122.5 (Fluor-C), 121.2 (Thioph-C), 120.1 (Fluor-C), 119.5 (Fluor-C), 61.6.

2',7'-Bis(bis(4-hexylphenyl)amino)spiro[cyclopenta[2,1-b:3,4-b']dithiophene-4,9'-fluorene]

HT-SO8. This product was obtained according to the general amination procedure starting from **7** (239.4 mg, 0.49 mmol) and bis(4-hexylphenyl)amine (345.4, 1.02 mmol). Flash column chromatography (silica gel, petroleum ether:CH₂Cl₂ 100:1) gave the title compound as a pale yellow sticky solid (315 mg, 64% yield).

¹H NMR (400 MHz, CDCl₃ + 1% v/v NH₂NH₂·H₂O): δ 7.50 (d, J = 8.4 Hz, 2H, Fluor-H), 7.05 (d, J = 4.8 Hz, 2H, Thioph-H), 6.95-6.91 (m, 10H, Ar-H, Fluor-H), 6.86 (d, J = 8.4 Hz, 8H, Ar-H), 6.57 (d, J = 2.0 Hz, 2H, Fluor-H), 6.52 (d, J = 4.8 Hz, 2H, Thioph-H), 2.50 (m, 8H, Alk-H), 1.55 (m, 8H, Alk-H), 1.33-1.29 (m, 24H, Alk-H), 0.89 (m, 12H, Alk-H); ¹³C NMR (100.6 MHz, CDCl₃ + 1% v/v NH₂NH₂·H₂O): δ 154.7, 147.0, 146.2, 145.3, 138.3, 137.1, 135.8, 128.9 (Ar-C), 125.2 (Thioph-C), 123.6 (Ar-C), 123.5 (Fluor-C), 121.3 (Thioph-C), 119.8 (Fluor-C), 118.8 (Fluor-C), 61.7, 35.3 (Alk-C), 31.8 (Alk-C), 31.5 (Alk-C), 29.0 (Alk-C), 22.7 (Alk-C), 14.2 (Alk-C).

2',7'-Bis(bis(4-methylphenyl)amino)spiro[cyclopenta[2,1-b:3,4-b']dithiophene-4,9'-fluorene]

HT-SO9. This product was obtained using the standard amination procedure starting from **7** (300.9 mg, 0.62 mmol) and bis(4-methylphenyl)amine (268.3 mg, 1.36 mmol). Flash column chromatography (silica gel, petroleum ether:CH₂Cl₂ 9:1) gave the title compound as a pale yellow solid (300 mg, 67% yield).

¹H NMR (400 MHz, CDCl₃ + 1% v/v NH₂NH₂·H₂O): δ 7.48 (d, J = 8.4 Hz, 2H, Fluor-H), 7.05 (d, J = 4.8 Hz, 2H, Thioph-H), 6.94 (br d, J = 8.4 Hz, 8H, Ar-H), 6.89 (dd, J = 8.4 Hz, J = 2.4 Hz, 2H, Fluor-H), 6.84 (br d, J = 8.4 Hz, 8H, Ar-H), 6.57 (d, J = 2.4 Hz, 2H, Fluor-H),

6.52 (d, J = 4.8 Hz, 2H, Thioph-H), 2.25 (s, 12H, CH₃); ¹³C NMR (100.6 MHz, CDCl₃ + 1% v/v NH₂NH₂·H₂O): δ 154.7, 146.9, 146.2, 145.3, 138.3, 135.8, 132.0, 129.7 (Ar-C), 125.3 (Thioph-C), 123.8 (Ar-C), 123.4 (Fluor-C), 121.3 (Thioph-C), 119.8 (Fluor-C), 118.5 (Fluor-C), 61.7, 29.7, 20.8 (CH₃).

5

2',7'-Bis(bis(4-phenoxyphenyl)amino)spiro[cyclopenta[2,1-b:3,4-b']dithiophene-4,9'-

fluorene] **HT-SO10**. This product was obtained using the standard amination procedure starting from **7** (208 mg, 0.43 mmol) and bis(4-phenoxyphenyl)amine (333.8 mg, 0.94 mmol). Flash column chromatography (silica gel, petroleum ether: AcOEt 95:5) gave the title

10

compound as an off-white solid (330 mg, 75% yield). ¹H NMR (400 MHz, CDCl₃ + 1% v/v NH₂NH₂·H₂O): δ 7.54 (d, J = 8.0 Hz, 2H, Fluor-H), 7.33-7.26 (m, 8H, PhO-H), 7.08-7.02 (m, 6H, PhO-H, Thioph-H), 6.99-6.93 (m, 18H, Fluor-H, PhO-H, Ar-H), 6.81 (d, J = 8.8 Hz, 8H, Ar-H), 6.52 (d, J = 2.0 Hz, 2H, Fluor-H), 6.49 (d, J = 5.2 Hz, 2H, Thioph-H); ¹³C NMR (100.6 MHz, CDCl₃ + 1% v/v NH₂NH₂·H₂O): δ 157.7,

15

154.7, 152.1, 147.0, 146.4, 143.3, 138.3, 135.9, 129.7 (PhO-C), 125.5 (Thioph-C), 125.2 (Ar-C), 123.1 (Fluor-C), 122.9 (PhO-C), 121.2 (Thioph-C), 120.0, 119.9 (Ar-C), 118.5 (Fluor-C), 118.3 (Ar-C), 61.6;

Example 2: Synthesis of solar cell having mixed fluorene/bithiophene spiro derivatives

20

Substrate preparation and Li-doping TiO₂

Nippon Sheet Glass 10 Ω/sq was cleaned by sonication in 2% Hellmanex water solution for 30 minutes. After rinsing with deionised water and ethanol, the substrates were further cleaned with UV ozone treatment for 15 min. Then, 30 nm TiO₂ compact layer was deposited

25

on FTO via spray pyrolysis at 450°C from a precursor solution of titanium diisopropoxide bis(acetylacetonate) in anhydrous ethanol. After the spraying, the substrates were left at 450°C for 45 min and left to cool down to room temperature. Then, mesoporous TiO₂ layer was deposited by spin coating for 20 s at 4000 rpm with a ramp of 2000 rpm s⁻¹, using 30 nm

30

particle paste (Dyesol 30 NR-D) diluted in ethanol to achieve 150-200 nm thick layer. After the spin coating, the substrates were immediately dried at 100°C for 10 min and then sintered again at 450°C for 30 min under dry air flow. Li-doping of mesoporous TiO₂ is accomplished by spin coating a 0.1 M solution of Li-TFSI in acetonitrile at 3000 rpm for 30 s followed by another sintering step at 450°C for 30 minutes. After cooling down to 150°C the substrates were immediately transferred in a nitrogen atmosphere glove box for depositing the

perovskite films.

Perovskite precursor solution and film preparation

The perovskite films were deposited from a precursor solution containing FAI (1 M) (formamidinium iodide), PbI₂ (1.1 M), MABr (0.2 M) (methylammonium iodide) and PbBr₂ (0.2 M) in anhydrous DMF:DMSO 4:1 (v:v). The perovskite solution was spin coated in a two steps program at 1000 and 4000 rpm for 10 and 30 s respectively. During the second step, 100 μ L of chlorobenzene was poured on the spinning substrate 15 s prior the end of the program. This perovskite is referred to as the “mixed perovskite”.

Another perovskite type, referred to as “standard perovskite, was prepared by dissolving a stoichiometric amount (1:1 molar ratio) of lead iodide and methyl ammonium iodide in dimethylsulfoxide at a concentration of 1.2 M of each component.

The substrates were then annealed at 100°C for 1 h in a nitrogen filled glove box.

Hole transporting layer and top electrode

After the perovskite annealing the substrates were cooled down for few minutes and a spirofluorene linked methoxy triphenylamines (spiro-OMeTAD, Merck) solution (70 mM in chlorobenzene) was spin coated at 4000 rpm for 20 s. The spiro-OMeTAD was doped with bis(trifluoromethylsulfonyl)imide lithium salt (Li-TFSI, Sigma-Aldrich), tris(2-(1H-pyrazol-1-yl)-4-tert-butylpyridine)- cobalt(III) tris(bis(trifluoromethylsulfonyl)imide) (FK209, Dynamo) and 4-tert-Butylpyridine (TBP, Sigma-Aldrich). The molar ratio of additives for spiro-OMeTAD was: 0.5, 0.03 and 3.3 for Li-TFSI, FK209 and TBP respectively.

SO solutions were prepared with molarities ranging from 50-150mM (in chlorobenzene). The optimised molar ratio of additives for SO₂ was: 0.5, 0.03 and 3.3 for Li-TFSI, FK209 and TBP respectively. The SO solution was spin coated at 4000 rpm for 20 s.

Finally 70-80 nm of gold top electrode was thermally evaporated under high vacuum.

Photovoltaic device testing

The solar cells were measured using a 450 W xenon light source (Oriel). The spectral mismatch between AM1.5G and the simulated illumination was reduced by the use of a Schott K113 Tempax filter (Präzisions Glas & Optik GmbH). The light intensity was calibrated with a Si photodiode equipped with an IR-cutoff filter (KG3, Schott) and it was recorded during each measurement. Current-voltage characteristics of the cells were obtained by applying an external voltage bias while measuring the current response with a digital

source meter (Keithley 2400). The voltage scan rate was 10 mV s^{-1} and no device preconditioning, such as light soaking or forward voltage bias applied for long time, was applied before starting the measurement. The starting voltage was determined as the potential at which the cells furnishes 1 mA in forward bias, no equilibration time was used. The cells were masked with a black metal mask (0.16 cm^2) to estimate the active area and reduce the influence of the scattered light.

Example 3: Photovoltaic characterization of solar cells of the invention

HT-SO2, HT-SO4 and HT-SO6 are compounds according to the invention and described in Figure 2. HT-SO1 and HT-SO5 based on a spiro dithiophene structure are shown for the purpose of comparison

In Table 1, it can be seen that HT-SO1, HT-SO2, HT-SO4, HT-SO5, and HT-SO6 yielded high photoconversion efficiencies (PCE) varying from 1.3% (HT-SO6 for the “standard” perovskite) to 20.2% (HT-SO2 for the “mixed” perovskite). The highest short circuit current densities (J_{sc}) were recorded for the HT-SO5 and HT-SO2 with 20.24 mA cm^{-2} and 23.4 mA cm^{-2} respectively. This is closed to the theoretical Shockley Queisser limit underlying that these HTMs are close or exceeding state-of-the-art HTMs such as Spiro-OMeTAD. Especially HT-SO2 has consistently outcompeted comparable Spiro-OMeTAD control cells in both fill factor (FF) and open circuit voltage (V_{oc}). It should be noted that this comparison is done for efficiency values which are among the highest recorded to date. Thus, these HTMs have the potential to replace Spiro altogether due to their more inexpensive synthesis route.

The exact performance parameters can be seen for the best current-voltage (JV) scans for the respective HTMs. The voltage scan rate was 10 mV s^{-1} and no device preconditioning was applied before starting the measurement, such as light soaking or forward voltage bias applied for long time. These conditions are similar to the protocols of solar cell certification. Moreover, the hysteresis was negligibly low ($<1.5\%$). This means the recorded values are representative of what can be realistically expected when operated under operating conditions. It should be noted that the described HTMs are doped with additives: tBP, LiTFSI, and Co, in order to ensure better charge transport dynamics (see Materials and Methods above for the exact compositions). This is typically done for Spiro-OMeTAD as well.


The highest performing HT-SO2 cell (20.2%) was measured after a few days again and still exhibited similar efficiencies indicating good stability when kept in a light-tight desiccator.

- 5 **Table 1:** Photovoltaic properties of solar cells comprising a compound of the invention as hole transporting material and "mixed" perovskite (perovskite with mixed formamidinium methylammonium cations and mixed iodine bromine anions) or standard perovskite (perovskite with methylammonium cation) in the sensitizer layer (see Figures 3A, 3B, and 3C)

Compounds	J_{sc} [mAcm^{-2}]	V_{oc} [mV]	FF	PCE [%]	Perovskite
HT-SO1	18.4	1069	0.33	6.6	mixed
HT-SO2	23.4	1091	0.78	20.2	mixed
HT-SO4	19.5	1118	0.649	14.3	mixed
HT-SO5	20.2	1113	0.74	16.7	mixed
HT-SO6	17.7	1119	0.734	14.6	mixed
HT-SO1	17.2	988	0.73	13.4	standard
HT-SO2	20.9	1100	0.76	17.7	standard
HT-SO5	9.4	953	0.64	5.7	standard
HT-SO4	18.8	1094	0.49	10.2	standard
HT-SO6	4.2	923	0.33	1.3	standard

Claims

1. A compound of formula (I)

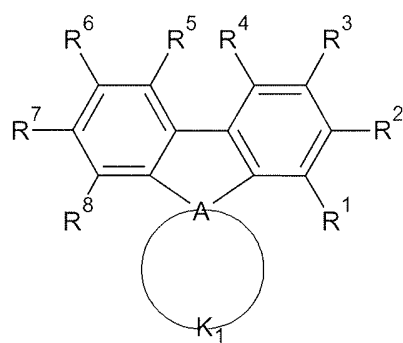


wherein

A is selected from Si or C atom;

R^1 , R^2 , R^3 , R^4 , R^5 , R^6 , R^7 and R^8 is independently selected from H, substituents comprising 1-50 carbons, 0-2 P-hydrocarbyl group, 1-20 heteroatoms being selected from O, S, N, from halogen being selected from Cl, F, Br, from C1-C30 alkyl, C1-C30 heteroalkyl, C4-C20 aryl group, C4-C20 heteroaryl group, C4-C30 alkylaryl group, C4-C30 aryloxy group or C4-C20 heteroaryloxy group, wherein the heteroatom is selected from O, S, Se, N and – P(=O)-, from-C≡N, and wherein alkyl, heteroalkyl, alkylaryl if they comprise 3 or more carbons, may be linear, branched or cyclic;

at least one R^1 , R^2 , R^3 , R^4 , R^5 , R^6 , R^7 and R^8 is different from H;

at least one R^1 , R^2 , R^3 , R^4 , R^5 , R^6 , R^7 or R^8 being different from H atom is independently selected from a substituent of formula (1)

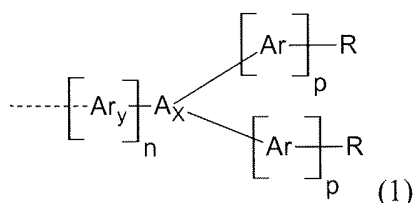

wherein

n and p is an integer selected from 0, 1 or 2;

A_x is selected from N or P(=O);

Ar_y and Ar are independently selected from a monocyclic system or a polycyclic system comprising fused aromatic rings or conjugated monocyclic aromatic rings, said ring comprising 0, 1 or 2 heteroatoms being selected from O, S and N, and is further substituted in


addition to R by other substituents independently selected from H, halogen, C1-C10 alkyl, C1-C10 alkoxy group, C1-C10 alkylthio (-S-alkyl) and -C≡N;


R is selected from H, R₁, -NR₁R₂, -O-R₁, -P(=O) R₁R₂, -S-R₁, or halogen, wherein R₁ and R₂ are independently selected from C4-C20 aryl, C4-C20 heteroaryl, C4-C20 aryloxy group, C4-C20 heteroaryloxy group, C4-C20 alkoxyaryl, C4-C20 alkoxyheteroaryl, C4-C20 aryl aryloxy group, C4-C20 heteroaryl aryloxy group, C1-C20 alkyl, C1-C20 alkoxy group, C1-C20 alkoxyalkyl, C1-C20 alkylthio, C2-C20 alkenyl and C2-C20 alkynyl, wherein said alkyl, alkoxy, alkoxyalkyl, alkenyl and alkynyl, if they comprise 3 or more carbons, may be linear, branched or cyclic and wherein aryl, heteroaryl, alkyl, alkenyl, alkynyl may be further substituted by alkoxy group, alkylthio group and alkyl; and wherein any one of R¹, R², R³, R⁴, R⁵, R⁶, R⁷ or R⁸ being different from said substituents as defined above is H;

K₁ is a conjugated system or a system of fused aromatics rings or fused non-aromatic rings comprising at least one heteroatom being selected from O, S and N, preferably from O, S, and N, wherein said aromatic rings may be further substituted by substituents being independently selected from H, and substituents being different from H as defined above for R¹, R², R³, R⁴, R⁵, R⁶, R⁷ or R⁸.

2. The compound according to claim 1 being selected from a compound of formula (Ia), (Ib) or (Ic)

20

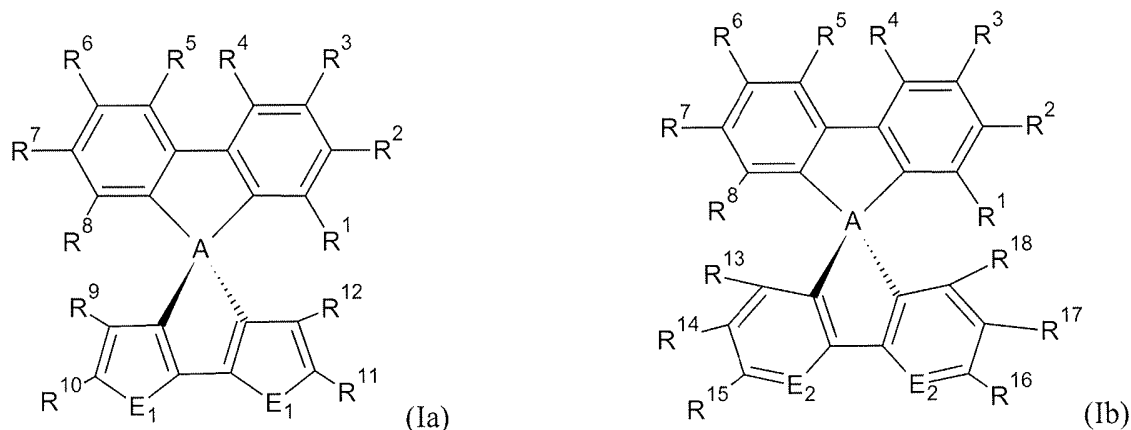

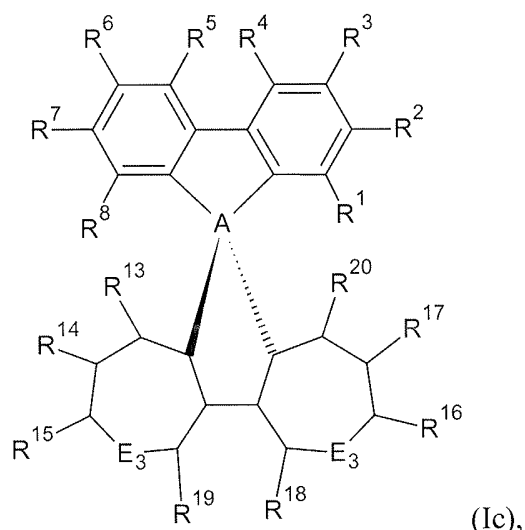


wherein















E_1 is selected from O, S and N, E_2 is selected from OR^{22} or SR^{22} , R^{22} being selected from BF_4^- , PF_6^- , $CF_3SO_3^-$ and halogen $^-$ being selected from Cl^- , F^- , Br^- , or I^- , E_3 is selected from O, S, NR^{21} or N, wherein R^{21} is independently selected from H, halogen being selected from Cl, F, Br, or I, from C1-C30 alkyl, C1-C30 heteroalkyl, C4-C30 aryl and C4-C30 heteroaryl, the heteroatom being selected from O, S, and N;

$R^1, R^2, R^3, R^4, R^5, R^6, R^7$ or R^8 are defined as in claim 1; and

$R^9, R^{10}, R^{11}, R^{12}, R^{13}, R^{14}, R^{15}, R^{16}, R^{17}, R^{18}, R^{19}$ and R^{20} are independently selected from H, halogen being selected from Cl, F, Br, or I, from $-C\equiv N$, C1-C30 alkyl, C1-C30 heteroalkyl, C4-C20 aryl, C4-C20 heteroaryl, C4-C30 alkylaryl group, C4-C30 aryloxy group or C4-C20 heteroaryloxy group, wherein the heteroatom is selected from O, S, N and $-P(=O)-$, , wherein alkyl, heteroalkyl, alkylaryl if they comprise 3 or more carbons, may be linear, branched or cyclic, and from a substituent being different from H as defined above for $R^1, R^2, R^3, R^4, R^5, R^6, R^7$ or R^8 .

3. The compound according to any of the preceding claims, wherein Ar_y and Ar are independently selected from moieties according to any one of formulae (2) to (19)

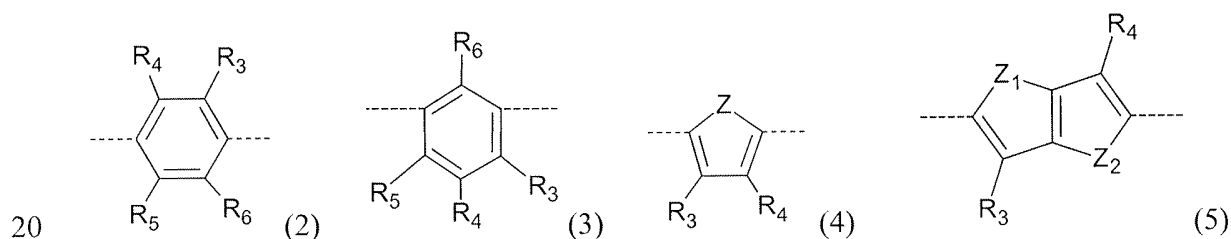

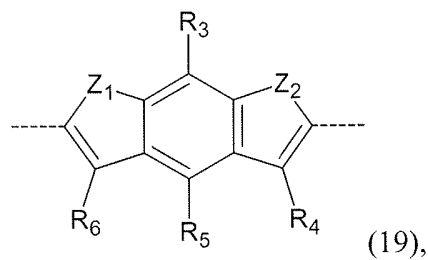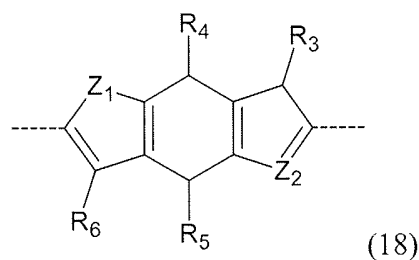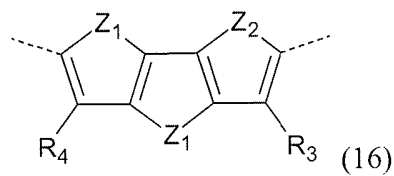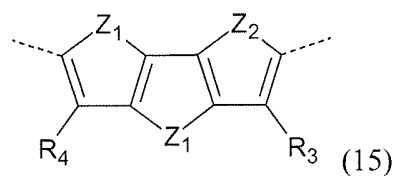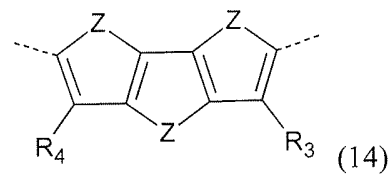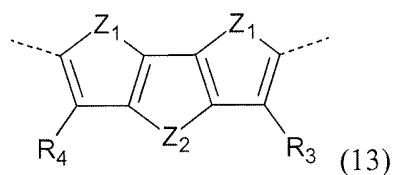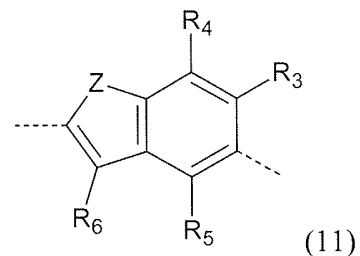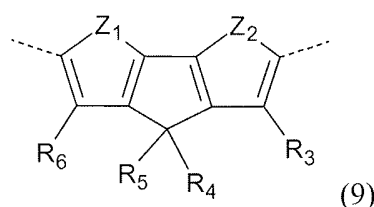

5

wherein

Z, Z₁, Z₂ are independently selected from O, S and Se atoms,




R₃, R₄, R₅ and R₆ are independently selected from H, halogen, C₁-C₁₀ alkyl, C₁-C₁₀ alkoxy group, C₁-C₁₀ alkylthio (-S-alkyl) and -C≡N.

10

4. The compound according to any one of claims 2-3, wherein R¹⁰ and R¹¹ of compound of formula (Ia), and/or R¹⁵ and R¹⁶ of a compound according to formula (Ib) or

(Ic), or R^{14} and R^{17} of a compound according to formula (Ib) or (Ic) are selected from a substituent of formula (1).

5. The compound according to any one of the preceding claims, wherein the compound of formula (I) is selected from a compound according to any one of formulae (Id), (Ie) and (If)

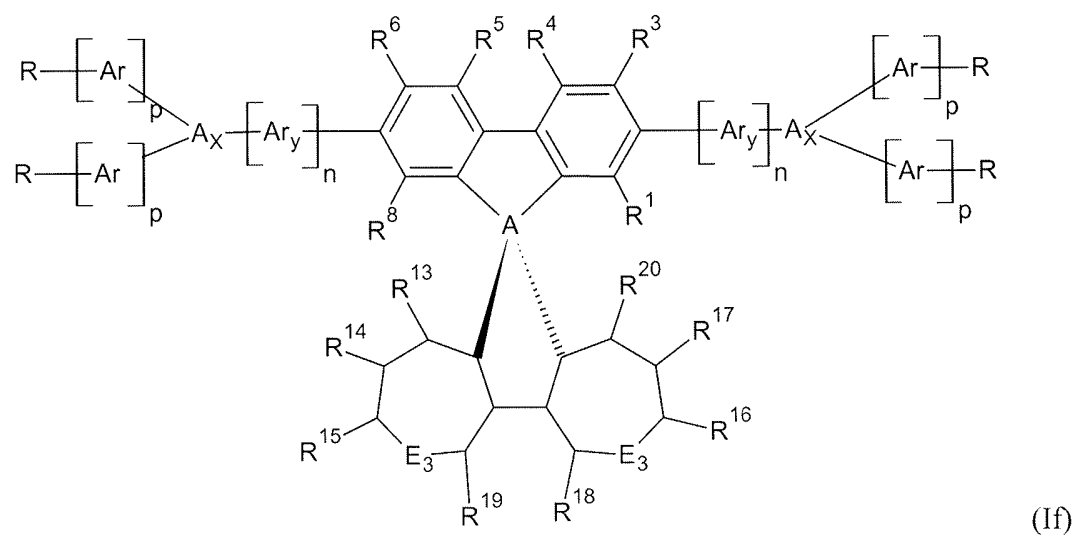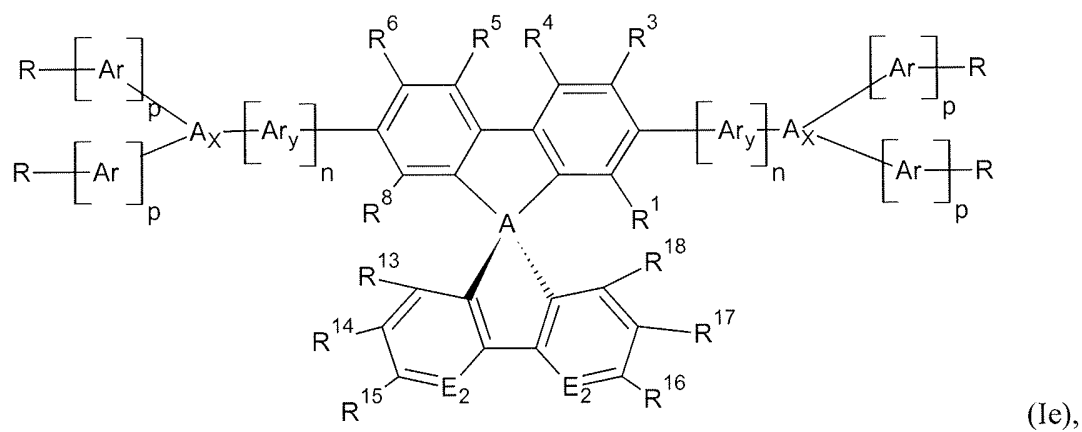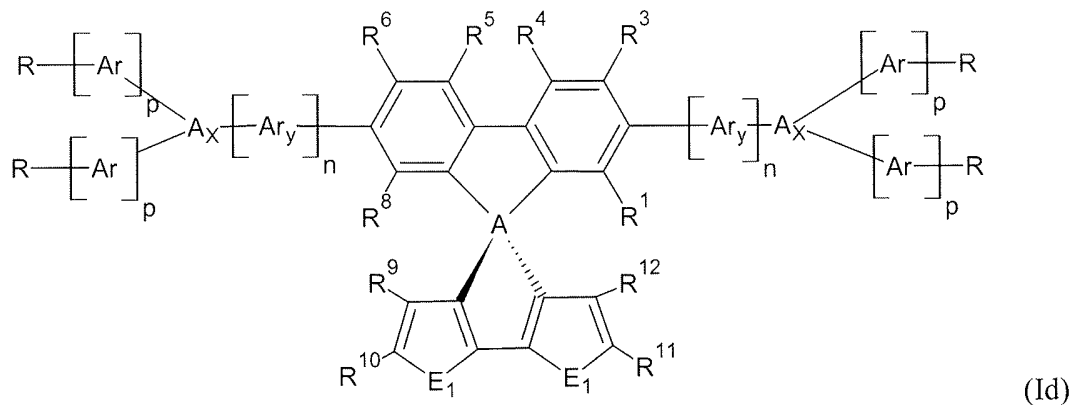

wherein A, Ar_y, A_x, Ar, n, p, R, E₁, E₂, E₃, R¹, R³, R⁴, R⁵, R⁶, R⁸, R⁹, R¹⁰, R¹¹, R¹², R¹³, R¹⁴, R¹⁵, R¹⁶, R¹⁷, R¹⁸, R¹⁹, R²⁰ and R²¹ are defined as above.

6. The compound according to any one of the preceding claims, wherein R¹, R³, R⁴, R⁵,
5 R⁶ and R⁸ is H.
7. The compound according to any one of claims 2 to 3, 5 and 6, wherein R⁹, R¹⁰, R¹¹,
R¹², R¹³, R¹⁴, R¹⁵, R¹⁶, R¹⁷, R¹⁸, R¹⁹ and R²⁰ are H.
- 10 8. A hole transporting material comprising at least one compound selected from formulae
(I), (Ia), (Ib), (Ic), (Id), (Ie) and (If) as defined in claims 1-7.
9. An optoelectronic and/or photoelectrochemical device comprising at least one
compound selected from a compound according to any one of formulae (I), (Ia), (Ib), (Ic),
15 (Id), (Ie) and (If) as defined in claims 1-7.
10. The optoelectronic and/or photoelectrochemical device according to claim 9
comprising a hole transporting layer comprising said at least one compound of selected from a
compound according to any one of formulae (I), (Ia), (Ib), (Ic), (Id), (Ie) and (If) and (Id) as
20 defined in claims 1-7.
11. The optoelectronic and/or photoelectrochemical device according to any one of claims
9-10 is selected from an organic photovoltaic device, a photovoltaic solid state device, an p-n
heterojunction, an organic solar cell, a dye sensitized solar cell, a solid state solar cell, a
25 phototransistor and OLED (organic light-emitting diode).
12. The optoelectronic and/or photoelectrochemical device according to any one of claims
9-11 is selected from a photovoltaic solid state device or a solar cell comprising an organic-
inorganic perovskite as sensitizer under the form of a layer.
- 30 13. The optoelectronic and/or photoelectrochemical device according to any one of claims
10-12, wherein the organic-inorganic perovskite layer material comprises a perovskite-
structure according any one of formulae (II), (IIa), (IIb), (IIc), (IId) and (IIe) below:



(II)

WMX₃ (IIa)

WW'N_{2/3}X₄ (IIb)

WN_{2/3}X₃ (IIc)

BN_{2/3}X₄ (IId)

5 BMX₄ (IIe),

wherein

W and W' are organic, monovalent cations that are independently selected from primary, secondary, tertiary or quaternary organic ammonium compounds, including N-containing heterorings and ring systems, W and W' having independently from 1 to 60
10 carbons and 1 to 20 heteroatoms;

B is an organic, bivalent cation selected from primary, secondary, tertiary or quaternary organic ammonium compounds having from 1 to 60 carbons and 2-20 heteroatoms and having two positively charged nitrogen atoms;

M is a divalent metal cation selected from the group consisting of Cu²⁺, Ni²⁺, Co²⁺,
15 Fe²⁺, Mn²⁺, Cr²⁺, Pd²⁺, Cd²⁺, Ge²⁺, Sn²⁺, Pb²⁺, Eu²⁺, or Yb²⁺;

N is selected from the group of Bi³⁺ and Sb³⁺; and,

X is independently selected from Cl⁻, Br⁻, I⁻, NCS⁻, CN⁻, and NCO⁻.

14. Use of a compound according to any one of claims 1-7 as a tuner of HOMO level.

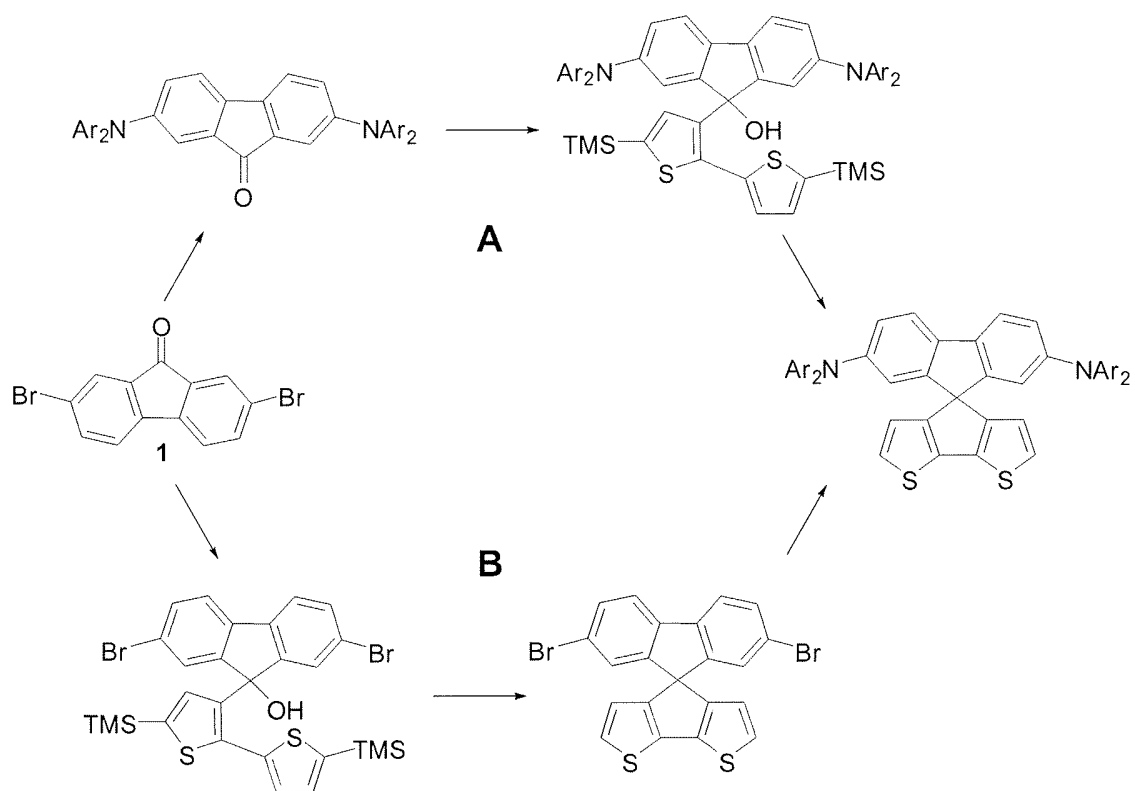


Figure 1A

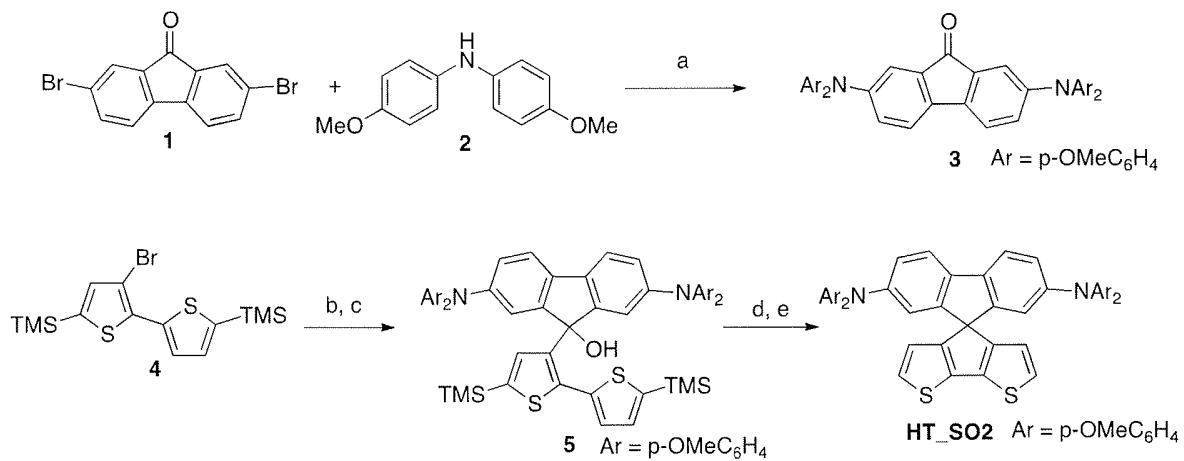


Figure 1B

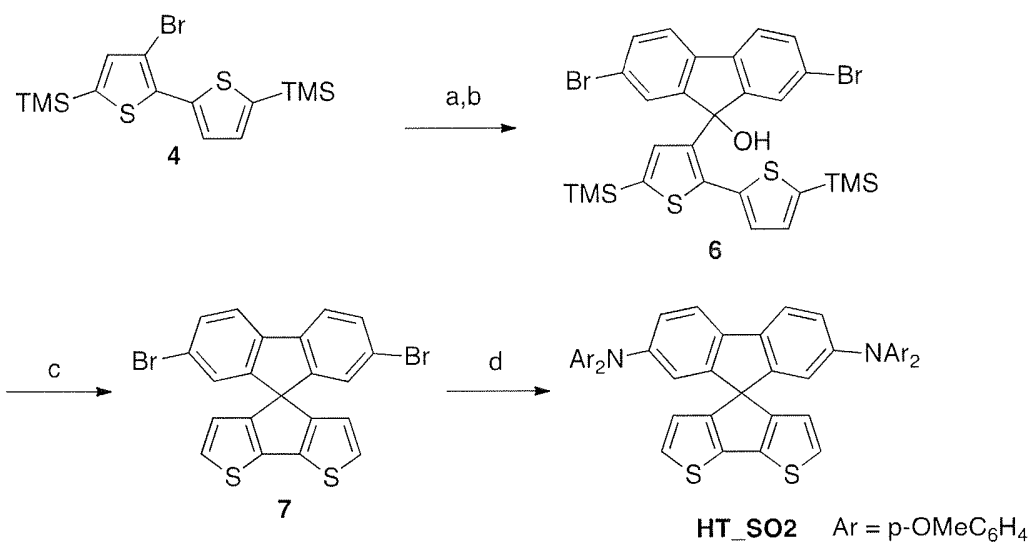


Figure 1C

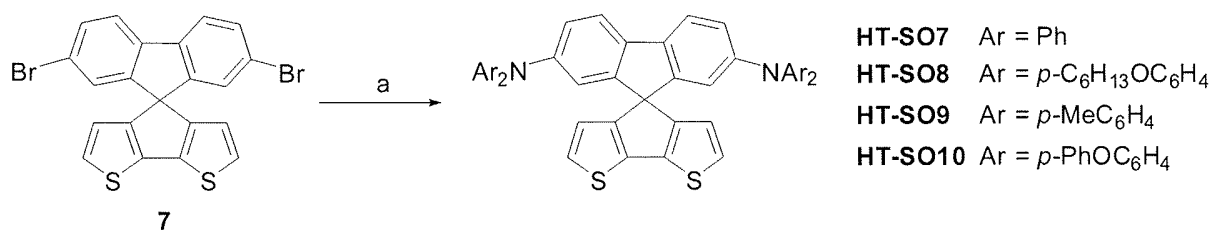


Figure 1D

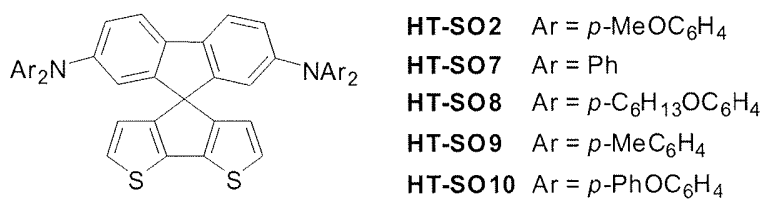


Figure 1E

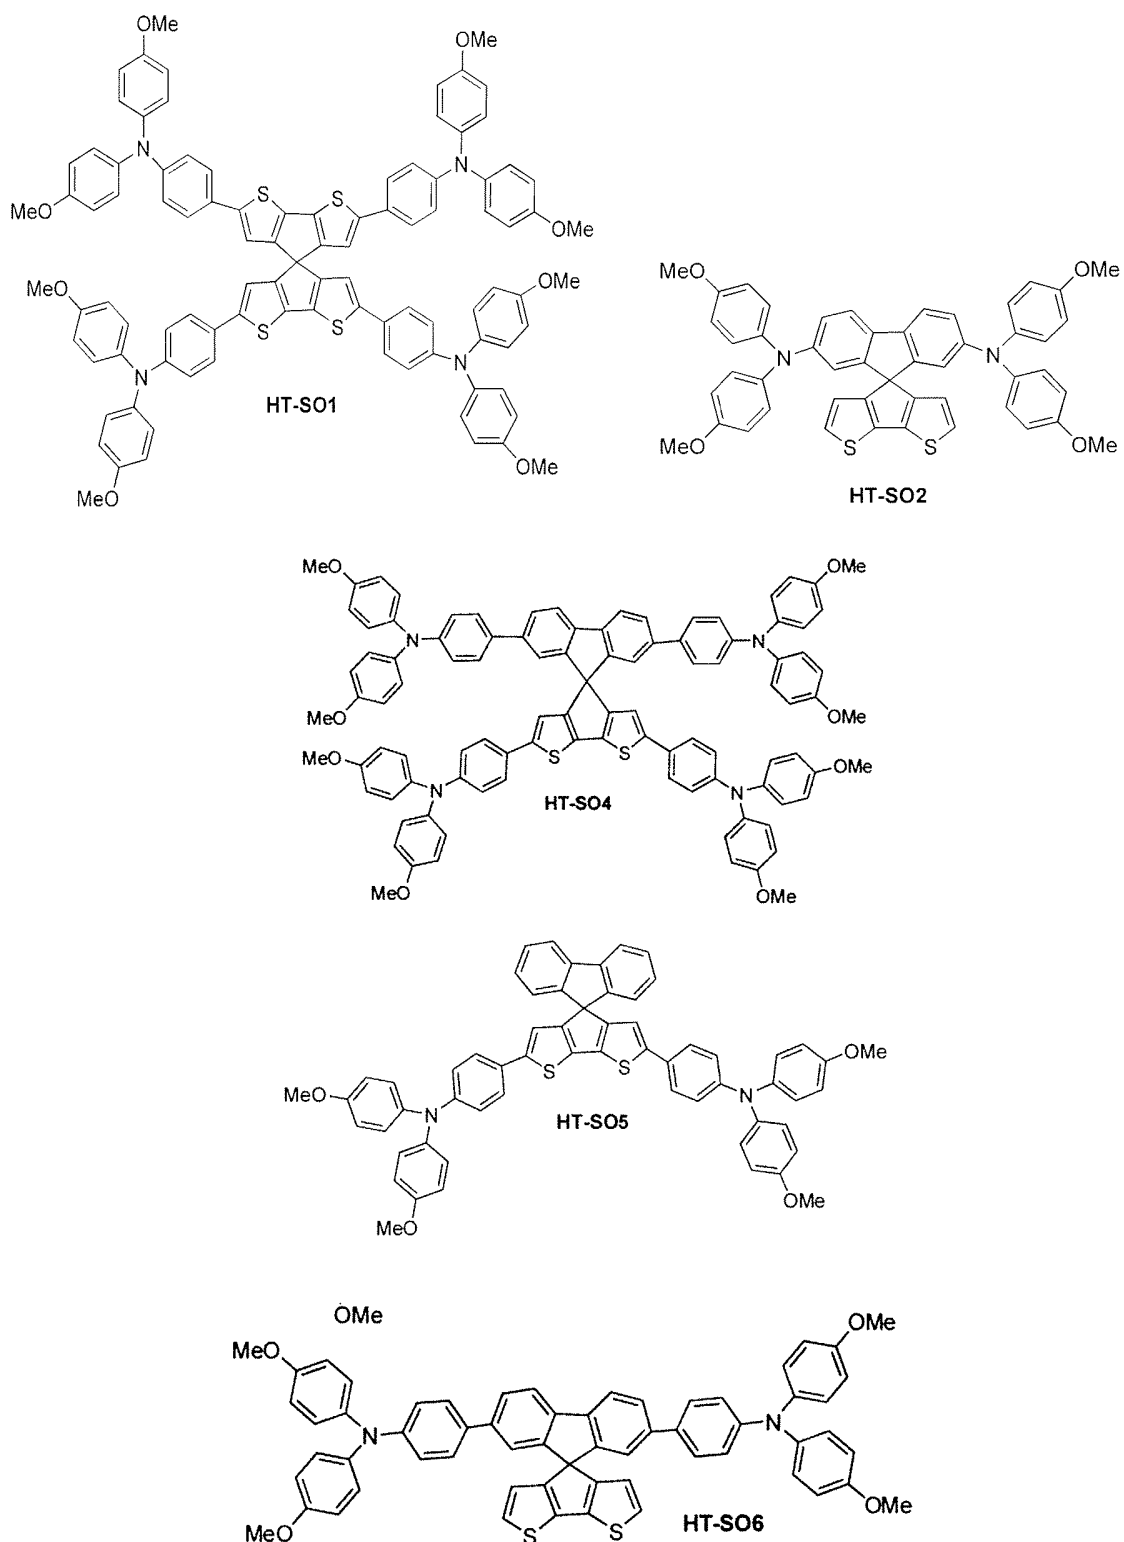


Figure 2

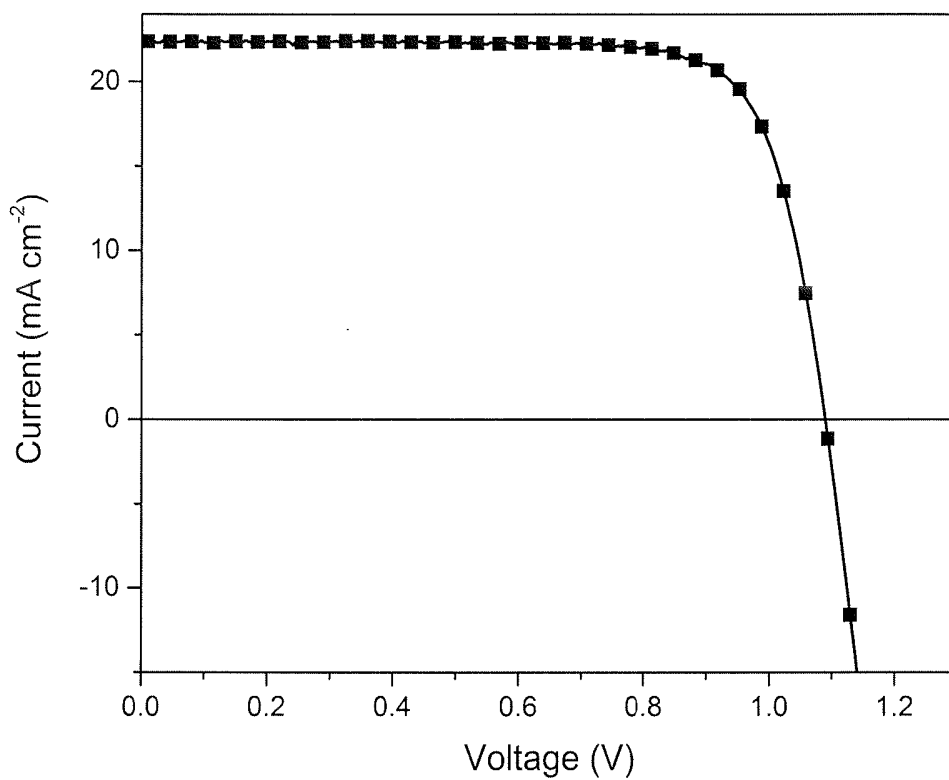


Figure 3A

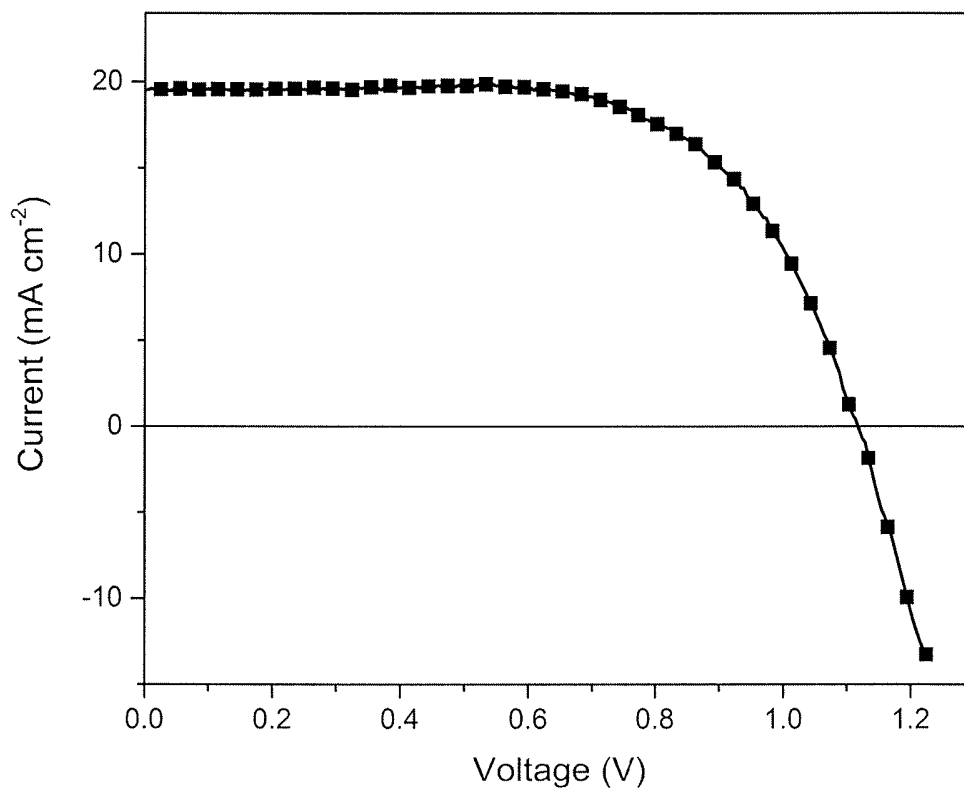


Figure 3B

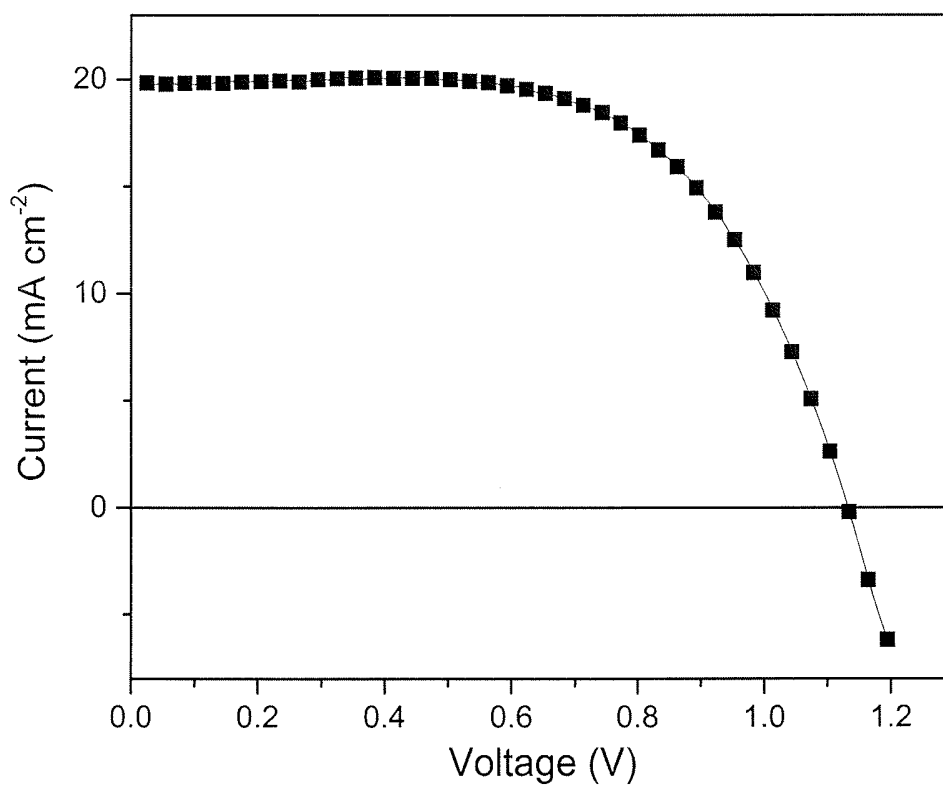


Figure 3C

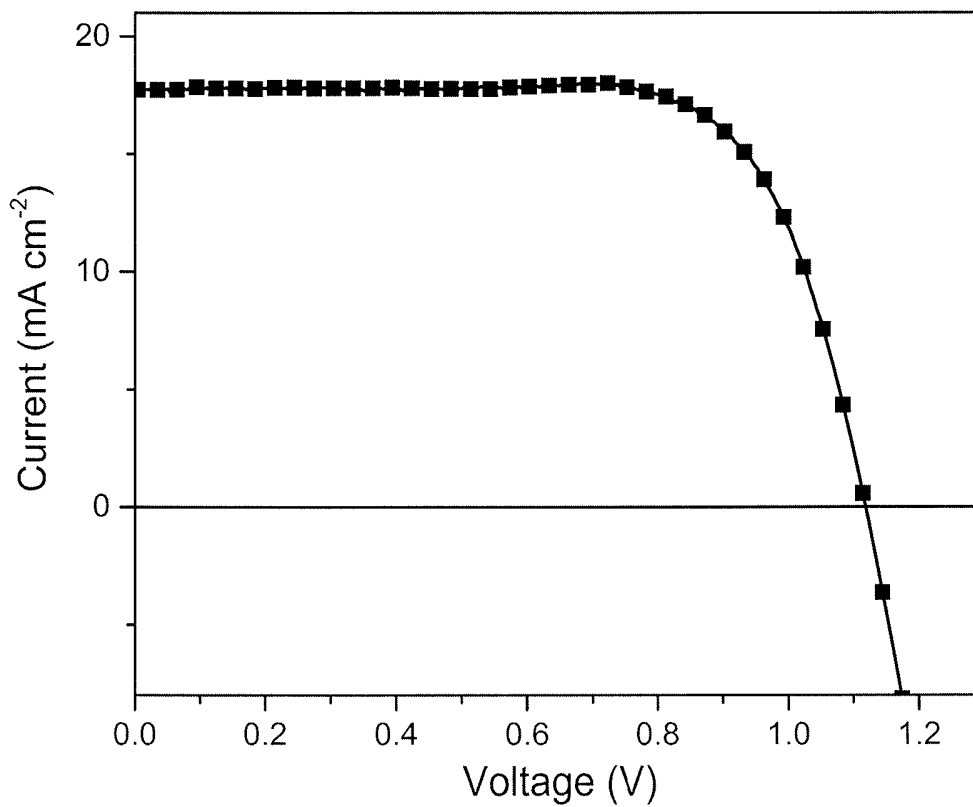


Figure 3D

INTERNATIONAL SEARCH REPORT

International application No PCT/IB2016/053657

A. CLASSIFICATION OF SUBJECT MATTER
 INV. H01L51/42 H01L51/00 C07C211/61
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
 Minimum documentation searched (classification system followed by classification symbols)
 H01L C07C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
 EPO-Internal, CHEM ABS Data, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	HSIAO-FAN CHEN ET AL: "Spiro-configured bipolar hosts incorporating 4,5-diazafluorene as the electron transport moiety for highly efficient red and green phosphorescent OLEDs", JOURNAL OF MATERIALS CHEMISTRY, vol. 22, no. 19, 15 March 2012 (2012-03-15), page 9658, XP055234525, GB	1,3-11, 14
A	ISSN: 0959-9428, DOI: 10.1039/c2jm30749a chart 1; page 9661, lines 30-40; table 2	2,12,13
X	EP 2 804 232 A1 (ABENGOA RES S L [ES]) 19 November 2014 (2014-11-19) paragraphs [0150] - [0157]	1-14
	----- -/--	

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family
--	--

Date of the actual completion of the international search 16 September 2016	Date of mailing of the international search report 23/09/2016
---	---

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Pöttsch, Robert
--	--

INTERNATIONAL SEARCH REPORT

International application No

PCT/IB2016/053657

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>HAO-CHUN TING ET AL: "A Novel Amine-Free Dye-Anchoring Organic Dye for Efficient Dye-Sensitized Solar Cells", ORGANIC LETTERS, vol. 14, no. 24, 12 October 2012 (2012-10-12), pages 6338-6341, XP055234442, DOI: 10.1021/o1303121z scheme 1; page 6341, lines 27-34</p>	1-14
A	<p>----- VICTORIEN JEUX ET AL: "Synthesis of Spiro[cyclopenta[1,2-b:5,4-b']DiThiophene-4,9'-Fluorenes] SDF dissymmetrically functionalized", TETRAHEDRON LETTERS, vol. 56, no. 11, 3 February 2015 (2015-02-03), pages 1383-1387, XP055235028, GB ISSN: 0040-4039, DOI: 10.1016/j.tetlet.2015.01.173 scheme 2; figure 3</p>	1-14
A	<p>----- ULLRICH MITSCHKE ET AL: "Synthesis, characterization, and electrogenerated chemiluminescence of phenyl-substituted, phenyl-annulated, and spirofluorenyl-bridged oligothiophenes", PERKIN TRANSACTIONS 1, no. 7, 8 March 2001 (2001-03-08), pages 740-753, XP055235012, GB ISSN: 1472-7781, DOI: 10.1039/b006553f scheme 3</p>	1-14
A	<p>----- BO XU ET AL: "Carbazole-Based Hole-Transport Materials for Efficient Solid-State Dye-Sensitized Solar Cells and Perovskite Solar Cells", ADVANCED MATERIALS, vol. 26, no. 38, 15 August 2014 (2014-08-15), pages 6629-6634, XP055167717, ISSN: 0935-9648, DOI: 10.1002/adma.201402415 figure 1 the whole document</p> <p>-----</p>	1-14

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2016/053657

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 2804232	A1	19-11-2014	NONE